


# BSUDFP15/4.0IP/AMZ 4MP IR MiniBall Camera



## Key features

- 1/3" Progressive Scan CMOS
- 2.8/3.6/6mm optional
- 4MP@15fps,3MP@20fps,1080P@30fps
- Triple Streams
- IR Range 10-15m
- Smart IR
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR

## Dimension

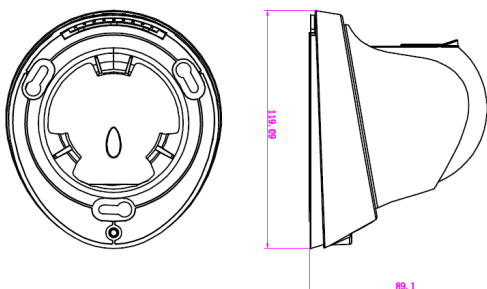

## Accessories

N/A

## Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.05Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	2.8/3.6/6mm optional
FOV	89°
IR LED	2pcs
IR Range	10-15m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	2688*1520/2560*1440/15fps,2304*1296/20fps,1920x1080/30fps
Stream	Stream1 2688*1520/2560*1440/2304*1296/1920x1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Auto
Defog	Yes
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Networkdisconnect,Diskalarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish, Italian, Portuguese, Spanish.
System Compatibility	Onvif,CGI
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	Default Not support,optional1ch Audio In,1ch Audio Out
Alarm I/O	Default Not support,optional1ch Alarm In,1ch Alarm Out
RS485	N/A
BNC Output	Default Not support ,Optional
Reset Button	Yes (build-in)
Edge Storage	Default Not support,OptionalMicro SD/SDHC slot ,Max 32GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W(IR LED OFF) ; 7W (IR LED ON)
OperatingTemperature	-25°C~+55°C
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	119.09x89.1mm
Product Weight	500g