


# BSUDVP30/2.0IP/AMZ 1080PVandal Network IR Dome



## Key features

- 1/3" Progressive Scan CMOS
- VF Lens 2.8-12mm
- 1080P@30fps
- Multiple Streams
- IR Range 20-30m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC

## Dimension

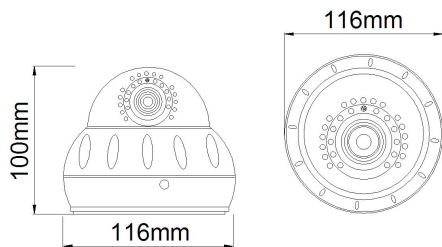

## Accessories

N/A

## Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.2Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	2.8-12mm VF Lens
FOV	89° ~ 35°
IR LED	24pcs
IR Range	20-30m
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/30fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	N/A
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Motion Detection,Networkdisconnect,Disk alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish, Italian, Portuguese, Spanish.
System Compatibility	Onvif,CGI
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	Default Not support ,Optional 1ch Audio In&1ch Audio Out
Alarm I/O	Default Not support ,Optional 1ch I/O
RS485	N/A
BNC Output	N/A
Reset Button	Built-in
Edge Storage	N/A
GENERAL	
Power Supply	DC12V,POE optional
Power Consumption	2.5W(IR LED OFF) ; 5W (IR LED ON)
OperatingTemperature	-20°C~+55°C
Operating Humidity	0% - 90% RH
Ingress Protection	IP64
Approvals	CE / FCC
Product Dimensions	φ 116×100mm
Product Weight	650g