


BSUXVM00/4.0IP/INT 1080P Network Box Camera



Key features

- 1/3" Progressive Scan CMOS
- VF Lens 3.0-12mm
- Resolution 2688x1520
- Multiple Streams
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridor mode,DIS
- Multiple Video Analytics

Dimension

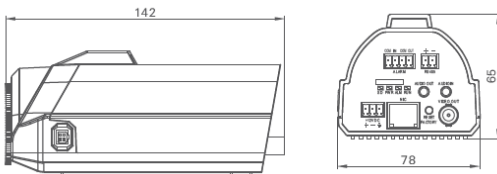

Accessories



SN-CH302HF



SN-BK314

Specifications

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. illumination	Color 0.01Lux(AGC ON); B&W 0.01Lux(AGC ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	N/A
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	2688*1520/2560*1440/20fps
Stream	Stream1 2688*1520/2560*1440/2304*1296/1920*1080 Stream 2 720p to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Base: MotionDetection,LineCrossing,Tamper, Area Intrusion, Network disconnect,Diskalarm,I/O alarm Advance: Motion Detection,LineCrossing,Tamper, Area Intrusion, Camera Move,Dwell,MultipleDwell,RetrogradeDetection,ObjectLeft,ObjectRemove ,Abnormal Speed,Illegal Parking,Networkdisconnect,Diskalarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish,Italian,Portuguese,Spanish.
System Compatibility	Onvif,CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	AC24V/DC12V/POE
Power Consumption	3W(MAX)
Operating Temperature	-10°C~+50°C
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	360g