

# BSUPVM60/3.0IP/SPDMIN12X 3.0MP Network IR High Speed Dome




## Specifications

### Key features

- 1/2.8" Progressive Scan CMOS
- 12X Optical Zoom, 16X Digital Zoom
- 2048(H) × 1536(V)/25fps
- Multiple Streams
- IR Range 60m
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR,De-fog

### Dimension

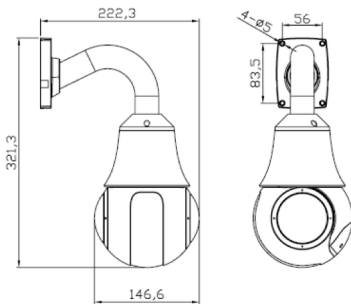

### Accessories



SN-CBK624A

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	Color 0.01Lux; B&W 0.001Lux; IR ON 0 Lux
Day & Night	ICR, Auto/Color/B&W
Shutter Speed	1/1-1/10000s
Auto Iris	Auto/Manual
Wide Dynamic Range	Yes, 78dB
Digital Noise Reduction	3D, Auto/Manual
Lens	SUNELL 12X Module , 4.7~56.4mm
Digital Zoom	16X
FOV	7.56° ~69.7°
IR LED	6 pcs
IR Range	60m
Pan/Tilt	Pan 0-360° continuously ,Tilt -10-98°
Pan/Tilt Speed	Pan 0.01-180° /s ,Tilt 0.01-90° /s ,Preset Speed 90° /s
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	100kb-12000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	2048(H) × 1536(V)/25fps
Stream	Stream1 2048(H) × 1536(V) Stream 2 D1 to 1080P/720P/D1/CIF/QCIF/VGA/QVGA/640x360
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Motion,Intrusion,LineCrossing,Tamper,Networkdisconnect,Diskalarm,I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese,Polish,Italian,Portuguese,Spanish.(Sunell Brand)
System Compatibility	Onvif,CGI
INTERFACE	
Ethernet	I1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	Optional 1ch Audio In,1ch Audio Out
Alarm I/O	Optional 2ch Alarm In,1ch Alarm Out
RS485	N/A
BNC Output	N/A
Reset Button	YES(Built-In)
Edge Storage	Micro SD/SDHC/SDXC slot(Built-in),Max 64GB
3D Position	YES
Coordinate Display	YES
Preset/Tour/Scan/Track	300/12/12/6
GENERAL	
Power Supply	Standard DC12V/POE+, optional AC24V
Power Consumption	MAX 25W
Operating Temperature	-40° C ~+60° C
Operating Humidity	0% - 90% RH
Protection	IP66,TVS4000V
Approvals	CE / FCC
Product Dimensions	321.3x222.3x146.6mm
Product Weight	1500g