


1080P StarLight Network Box Camera



Key features

- 1/2.8" Progressive Scan CMOS
- 1080P Resolution
- Triple Streams
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,hlc,Corridor mode ,DIS
- Multiple Video Analytics

Dimension

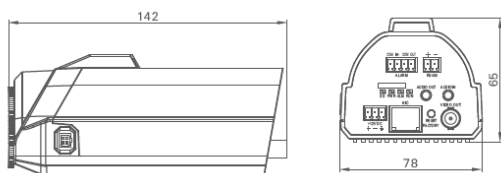

Accessories



SN-CH302HF



SN-BK314

Specifications

CAMERA	
Image Sensor	1/1.9" Progressive Scan CMOS
Min. illumination	Color 0.002Lux(AGC ON); B&W 0.0002Lux(AGC ON)
Day & Night	ICR
Shutter Speed	1-1/33000
Auto Iris	N/A
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	N/A
FOV	N/A
IR LED	N/A
IR Range	N/A
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,_RAW_PCM
Max.Resolution	1920*1080/30fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA
Image Setting	Rotate Mode,Saturation,Brightness,Contrast,Sharpness
HLC	Yes
ROI	Yes
9:16 Corridor Mode	Yes
DIS	Auto
Defog	Yes
NETWORK	
Network Protocols:	HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast and Multicast supported.
Alarm Trigger	Base: Motion Detection, Line Crossing, Tamper, Area Intrusion, Network disconnect, Disk alarm, I/O alarm Advance: Motion Detection, Line Crossing, Tamper, Area Intrusion, Camera Move, Dwell, Multiple Dwell, Retrograde Detection, Object Left, Object Remove, Abnormal Speed, Illegal Parking, Network disconnect, Disk alarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish.
System Compatibility	Onvif, CGI
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In, 1ch Audio Out
Alarm I/O	1ch Alarm In, 1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 64GB
GENERAL	
Power Supply	AC24V/DC12V/POE
Power Consumption	5W(MAX)
Operating Temperature	-10°C~+50°C
Operating Humidity	0% - 90% RH
Ingress Protection	N/A
Approvals	CE / FCC
Product Dimensions	142mm(D)x78mm(W)x65mm(H)
Product Weight	360g