


BSUNVR10/08E3- 32NSE/8 32CH 8HDD NVR



Key features

- Up to 32ch 1080P IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 8 SATA hard disk up to 4TB
- 2RJ45 10M/100M/1000M network interface
- Simultaneous HDMI&VGA up to 1080P output
- 2 x 2.0 USB Host
- 1ch Alarm I/O ,
- 1ch Audio I/O
- 2U

Dimension

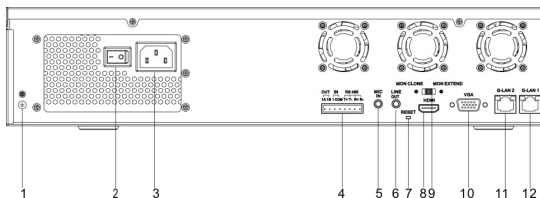

Interface Introduction

1. Ground connection
2. Power ON/OFF switch
3. AC110/220V power supply
4. Alarm I/O and RS485
5. Audio In
6. Audio out
7. Reset
8. HDMI output
9. HDMI/VGA switch
10. VGA output
11. RJ 45 10M/100M/1000M Network interface
12. RJ 45 10M/100M/1000M Network interface

Specifications

VIDEO/AUDIO INPUT	
Video Input	32ch 6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Incoming Bandwidth	192Mbps ,(main stream 144Mbps ,sub stream 48Mbps)
Outgoing Channel	Up to 16ch (Total 48Mbps)
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Frame Rate	6MP/5MP/4MP/3MP@15fps; 1080P@25fps(PAL),30fps(NTSC);
Live View/Playback Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Live View/Playback Capacity	Live View 16ch D1/4ch 1080P,1ch 6MP/5MP/4MP/3MP Playback 4ch 1080P,1ch 6MP/5MP/4MP/3MP
HDMI/VGA Output	1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1ch,Line out
HARD DISK	
SATA HDD	8 pcs
Mounting Mode	Embedded
Capacity	Up to 4TB for each disk
NETWORK	
Network Interface	2 RJ45 10M/100M /1000M network interface
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	N/A
POE Max Power	N/A
INTERFACE	
HDMI/VGA	1ch HDMI, 1ch VGA
USB	USB 2.0 x2
Audio I/O	1ch MIC in,1ch audio line out
Alarm I/O	1ch Alarm output, 1ch Alarm input
Reset Button	Yes
GENERAL	
Power Supply	AC110/220V,47-63Hz ,Max input 200W
Power Consumption	Max 15W(without HDD,USB)
Operating Temperature	-10℃~+45℃
Operating Humidity	0% - 90% RH
Chassis	2U
Product Dimensions	440x435x89.8mm
Product Weight	7.2kg