

DH-NVR6064/6064D/6064DR

64 Channel Super Network Video Recorder



Features

- Max 64ch IP cameras connection
- Up to 16 channel HD realtime transmission
- up to 64 channel@D1, 32 channel@720P, 16 channel@1080P realtime recording
- Up to 6-screen output: 6 HDMI sync output/1 VGA+5 HDMI sync output (Default: 2HDMI+1VGA)
- Support 16 hot-swap SATA HDDs to better its scalability and flexibility
- Support RAID0/1/5
- Human-oriented Dahua UI
- Compatible with Dahua SDK and seamless integrated to other platforms
- Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- Redundant power supply module adopted (DH-NVR6064DR)
- Front LCD display (DH-NVR6064D/DH-NVR6064DR)

DH-NVR6064/6064D/6064DR

Technical Specifications


Model	DH-NVR6064	DH-NVR6064D	DH-NVR6064DR
System			
Main Processor	Intel® Core™ i3 Processors		
Operating System	Embedded LINUX		
Motherboard	Embedded Board (Support 7x24 operation)		
Memory	2GB DDR3(up to 8GB)		
Case	Hot-dipped galvanized sheet steel(1.2mm thickened), High-precise aluminum alloy slide, Patented pull-out rack design		
Fan	Dual ball screw bearing fan, MTBF>100,000h, support replacement during operation		
Interface	Local GUI &WEB GUI		
Video & Audio			
Input	64ch@D1/32ch@720P/16ch@1080P		
Transmission	64ch@D1/32ch@720P/16ch@1080P		
Recording	64ch@D1/32ch@720P/16ch@1080P		
Playback	4ch@1080P/8ch@720P/16ch@D1 (Screen 1)		
Recording Resolution	8M, 5M, 3M, 1080P, 720P, 960H, D1, CIF, QCIF, VGA		
Audio	1ch Mic in, 1 audio in/out,		
Recording			
Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop		
Alarm Recording	Video loss, Camera blank, Motion detection, External alarm		
Backup Mode	Network download / USB HDD / eSATA Device		
Display			
Interface	6 HDMI, 1 VGA (Default: 2HDMI+1VGA)		
Video Output	6 HDMI, or 1ch VGA(or built-in LCD) & 5ch HDMI sync video output		
Multi-screen Display	The 1 st screen: 1/4/6/8/9/16/32/64 The 2 nd -6 th screens: 1/4		
Privacy Masking	Max 8 customized zones for privacy masking for each area		
Hard Disk			
Hard Disk	16 SATAII		
HDD Mode	Single, Raid 0, Raid 1, Raid 5. (Support global HDD Hot-spare)		
HDD Installation	Independent HDD rack, support hot swap		
Network			
Interface	4 RJ-45 ports(10/100/1000M)		
Ethernet Port	4 Ethernet ports joint working or 4 independent 1000M Ethernet ports		
MD & Alarm			
Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)		
Alarm Input	16ch, low level effective, green terminal interface		

DH-NVR6064/6064D/6064DR


Relay Output	8ch, Relay contact(1A@24VDC), NO/NC programmable, green terminal interface	
Interface		
Front cover	Support hot swap, 7" inch HD LCD (1920 x 1080 / 1280 x 1024 / 1024 x 768) (Model -D only)	
USB	4 USB ports(2 on the front-panel, 2 on the rear panel)	
eSATA	1 eSATA (Video Backup)	
General		
Power Supply	100V-240Vac, 47-63Hz	100V-240Vac, 47-63Hz, Redundant
Power Consumption	<240W (Include HDD)	
Working Environment	-10°C~55°C	
Working Humidity	10%~80% (non-condensation)	
Dimension	485mm×448mm×133.2mm (W×D×H)	
Weight	35Kg	
Installation	Rack-mounted	

DH-NVR6064/6064D/6064DR

Panel:

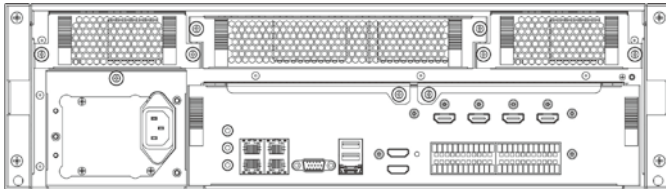

Dimensions:

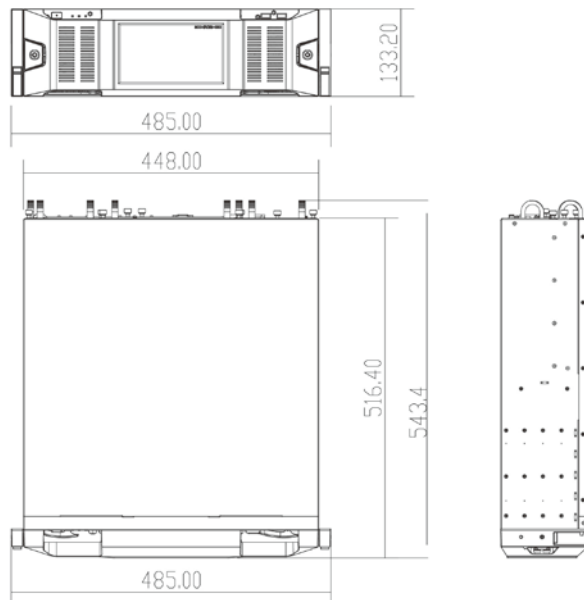

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.