

DH-NVR6000/6000D/6000DR

128 Channel Super Network Video Recorder



Features

- Max 128ch IP cameras connection
- Up to 32 channel HD realtime transmission
- up to 128 channel@D1, 64 channel@720P, 32 channel@1080P realtime recording
- Up to 6-screen output: 6 HDMI sync output/1 VGA+5 HDMI sync output (Default: 2 HDMI+1VGA)
- Support 16 hot-swap SATA HDDs to better its scalability and flexibility
- Support RAID0/1/5
- Human-oriented Dahua UI
- Compatible with Dahua SDK and seamless integrated to other platforms
- Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- ONVIF Version 2.0 conformance
- Redundant power supply module adopted (DH-NVR6000DR)
- Front LCD display (DH-NVR6000D/DH-NVR6000DR)

DH-NVR6000/6000D/6000DR

Technical Specifications


Model	DH-NVR6000	DH-NVR6000D	DH-NVR6000DR
System			
Main Processor	Intel® Core™ i5 Processors		
Operating System	Embedded LINUX		
Motherboard	Embedded Board (Support 7x24 operation)		
Memory	4GB DDR3(up to 8GB)		
Case	Hot-dipped galvanized sheet steel(1.2mm thickened), High-precise aluminum alloy slide, Patented pull-out rack design		
Fan	Dual ball screw bearing fan, MTBF>100,000h, support replacement during operation		
Interface	Local GUI &WEB GUI		
Video & Audio			
Input	128ch@D1/64ch@720P/32ch@1080P		
Transmission	128ch@D1/64ch@720P/32ch@1080P		
Recording	128ch@D1/64ch@720P/32ch@1080P		
Playback	4ch@1080P/8ch@720P/16ch@D1 (Screen 1)		
Recording Resolution	8M, 5M, 3M, 1080P, 720P, 960H, D1, CIF, QCIF, VGA		
Audio	1ch audio & 1ch Mic in, 1ch audio out		
Recording			
Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop		
Alarm Recording	Video loss, Camera blank, Motion detection, External alarm		
Backup Mode	Network download / USB HDD/ eSATA Device		
Display			
Interface	6 HDMI, 1 VGA (Default: 2 HDMI+1 VGA)		
Video Output	6 HDMI, or 1ch VGA(or built-in LCD) & 5ch HDMI sync video output		
Multi-screen Display	The 1 st screen: 1/4/6/8/9/16/32/64 The 2 nd -6 th screens: 1/4		
Privacy Masking	Max eight customized zones for privacy masking for each area		
Hard Disk			
Hard Disk	16 SATAII		
HDD Mode	Single, Raid 0, Raid 1, Raid 5. (Support global HDD Hot-spare)		
HDD Installation	Independent HDD rack, support hot swap		
Network			
Interface	4 RJ-45 ports(10/100/1000M)		
Ethernet Port	4 Ethernet ports joint working or 4 independent 1000M Ethernet ports		
MD & Alarm			
Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)		
Alarm Input	16ch, low level effective, green terminal interface		

DH-NVR6000/6000D/6000DR


Relay Output	8ch, Relay contact(1A@24VDC), NO/NC programmable, green terminal interface	
Interface		
Front cover	Support hot swap, 7" inch HD LCD (1920 x 1080 / 1280 x 1024 / 1024 x 768) (Model -D only)	
USB	4 USB ports(2 on the front-panel, 2 on the rear panel)	
eSATA	1 eSATA (Video Backup)	
General		
Power Supply	100V-240Vac, 47-63Hz	100V-240Vac, 47-63Hz, Redundant
Power Consumption	<240W (Include HDD)	
Working Environment	-10°C~55°C	
Working Humidity	10%~80% (non-condensation)	
Dimension	485mm×448mm×133.2mm (W×D×H)	
Weight	35Kg	
Installation	Rack-mounted	

DH-NVR6000/6000D/6000DR

Panel:

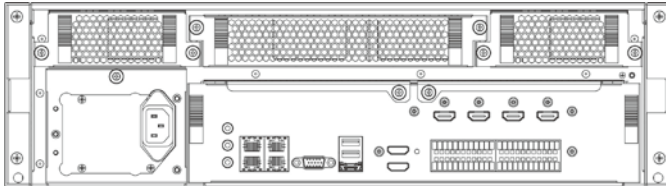

Dimensions:

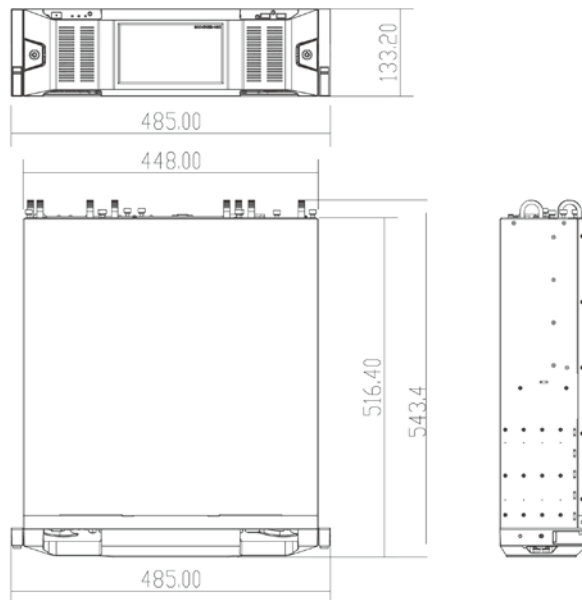

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.