

### 4MP Full HD WDR Network Small IR Dome Camera

#### Key Features

- 1/3" progressive scan CMOS
- Support H.264&MJPEG dual codec
- Max 20fps@4M(2688×1520) & 25/30fps@3M(2304×1296)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(PVMS) & Smart Phone(PMOB)
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs Length 50m




#### Technical Specifications

<b>Model</b>	PI-SFW403L
<b>Camera</b>	
Image Sensor	1/3" progressive scan CMOS
Effective Pixels	2688(H)×1520(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3-1/100000s
Min. Illumination	0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
S/N Ratio	More than 50dB
Video Output	N/A
<b>Camera Features</b>	
Max. IR LEDs Length	50m
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / WDR(120dB)
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
<b>Lens</b>	
Focal Length	3.6mm (6mm optional)
Max Aperture	F2.0(F2.0)
Focus Control	Manual
Angle of View	H:91°(63°)
Lens Type	Fixed lens
Mount Type	Board-in Type
<b>Video</b>	
Compression	H.264/H.264H/H.264B/MJPEG
Resolution	4M(2560×1440)/3M(2304×1296)/1080P(1920×1080)720P(1280×720)/D1(704×576/704×480) / CIF(352×288/352×240)
Frame Rate	Main Stream 1080P/720P(1-25/30fps) Sub Stream D1/CIF(1-25/30fps) Third Stream 720P(1-13/4fps)
Bit Rate	H.264: 32Kbps-32Mbps
Corridor Mode	Support
<b>Audio</b>	
Compression	G.711a/ G.711u/ AAC(only for-AS) These are optional item
Interface	Built-in Mic(only for-AS) These are optional item
<b>Smart Function(Optional)</b>	
Smart detection	Tripwire
	Intrusion
	Abandoned/Missing
	Scene Change
	Audio detect
Face detect	
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD Max 128GB(only for-AS) These are optional item
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A

<b>General</b>	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Max 4W
Working Environment	-30°C→+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	110mm×95mm
Weight	0.32Kg

#### Dimensions (mm)

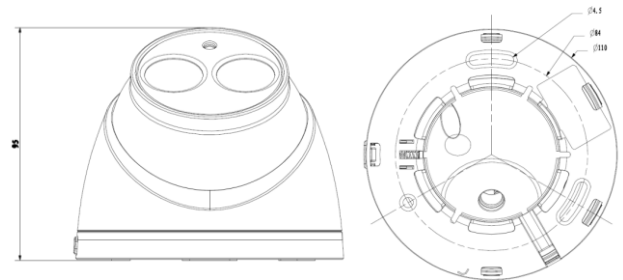

#### Accessories (optional)

