Network Video Recorder

NVR201-04LP

UNV



Key Features


4-channel input
Third-party IP cameras supported with ONVIF conformance
HDMI and VGA output up to 1080P
Up to 4 Megapixels resolution recording
Accurate retrieval, instant playback
1 SATA HDD up to 6 TB
Plug & Play with up to 4 independent PoE network interfaces
Support for P2P, UPnP, NTP, DHCP, PPPoE
Support for mobile client access

Specifications


	NVR201-04LP
Video and Audio	
IP Video Input	4-ch
Two-way audio input	1-ch,RCA
Network	
Incoming bandwidth	40Mbps
Outgoing bandwidth	64Mbps
Remote connection	128
Video/Audio Output	
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz,1920x1080p /50Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch,RCA
Synchronous Playback	4-ch
Decoding	
Compression	H.264
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4MP@20, 4 x 1080P@30
Hard Disk	
SATA	1 SATA interface
Capacity	up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100Mself-adaptive Ethernet Interface
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS,IP Filter, PPPOE, DDNS, FTP, IP Server, P2P
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
PoE	
Interface	4 independent 100 Mbps PoEnetwork interfaces
Supported Standard	IEEE 802.3at
General	
Power Supply	48VDC
Consumption(without HDD and PoE)	≤8 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	205 ×205 × 42mm (8.1" × 8.1" × 1.7")
Weight(without HDD)	≤ 0.58 Kg (1.27lb)

UNV

Dimensions

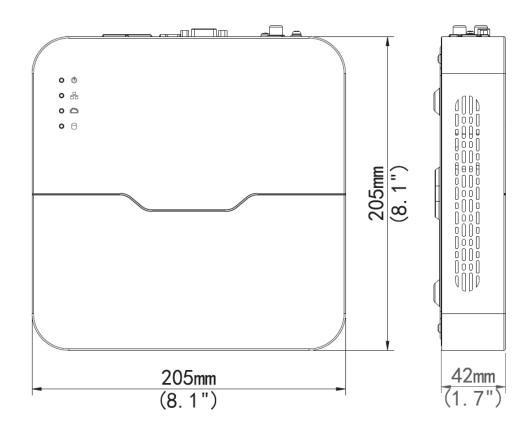

Rear Panel

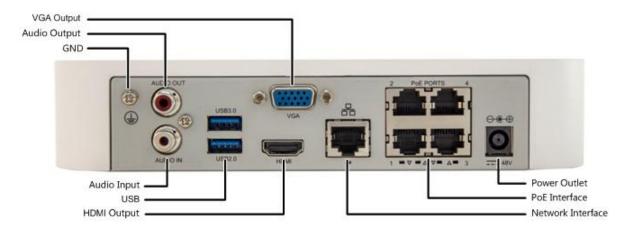

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com;globalsupport@uniview.com

http://www.uniview.com

©2011-2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.