

Network Video Recorder

NVR308E Series



Key Features

16/32/64-channel input

Third-party IP cameras supported with ONVIF conformance

Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution

Up to 8 Megapixels resolution recording

Support H.265/H.264 video formats

Accurate retrieval, instant playback

SATA HDD up to 48TB

Support for 12V Power output


Support for P2P, UPnP, NTP, DHCP, PPPoE

Support for mobile client access


Specifications

	NVR308-16E	NVR308-32E	NVR308-64E
Video and Audio			
IP Video Input	16-ch	32-ch	64-ch
Two-way audio Input	1-ch, RCA		
Network			
Incoming bandwidth	160Mbps	320Mbps	
Outgoing bandwidth	320Mbps		
Remote connection	128		
Video/Audio Output			
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
CVBS Output	1-ch, BNC		
Audio Output	1-ch, RCA		
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Synchronous Playback	16-ch		
Decoding			
Compression	H.265/H.264		
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	4 x 4K@30, 8 x 4MP@20, 16 x 1080P@25, 32 x 720P@25, 64 x D1		
Hard Disk			
SATA	8 SATA interfaces		
Capacity	up to 6TB for each disk		
External Interface			
Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces		
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Server, P2P		
Serial Interface	1 x RS-232, 1 x RS-485		
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0		
Alarm In	16-ch		
Alarm Out	4-ch		
General			
Power Supply	100 ~ 240 VAC		
Consumption (without HDD)	≤ 20 W		
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)		
Working Humidity	10% ~ 90%		
Dimensions	86mm × 442mm × 425mm (3.4" × 17.4" × 16.7")		
Weight (without HDD)	≤ 5.13 Kg (11.31 lb)		

Dimensions

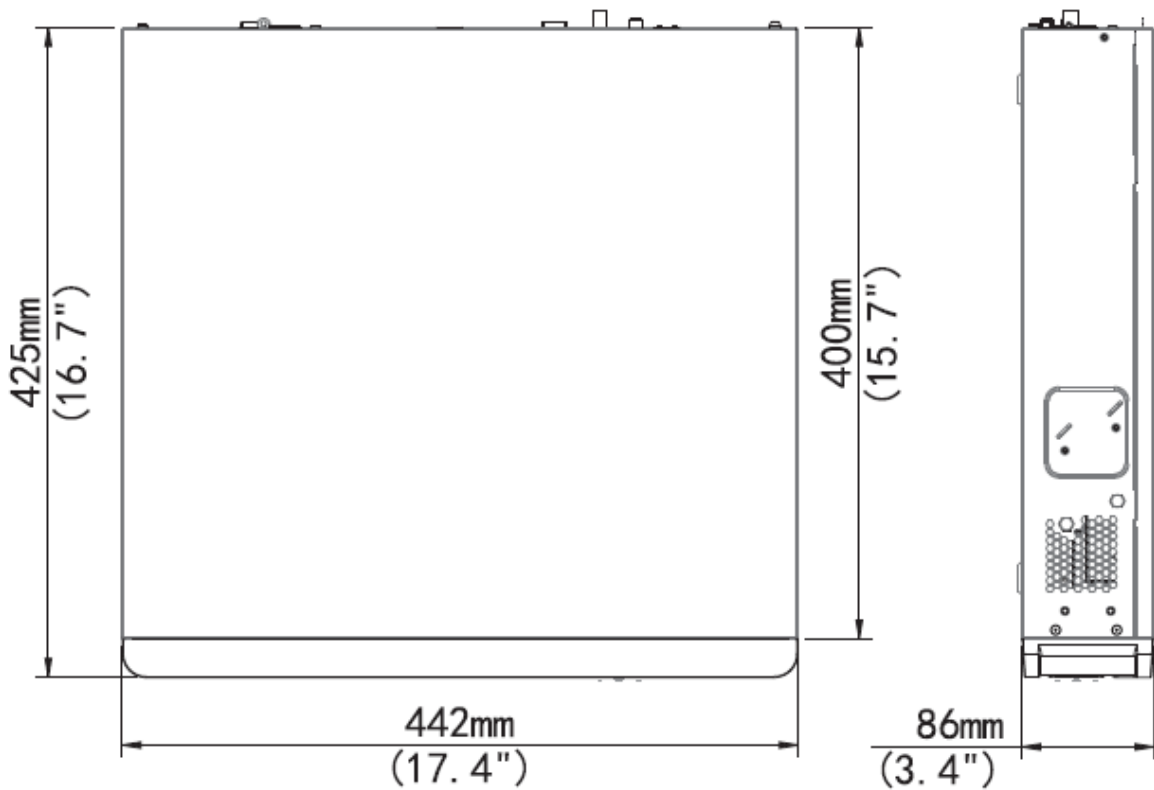

Rear Panel

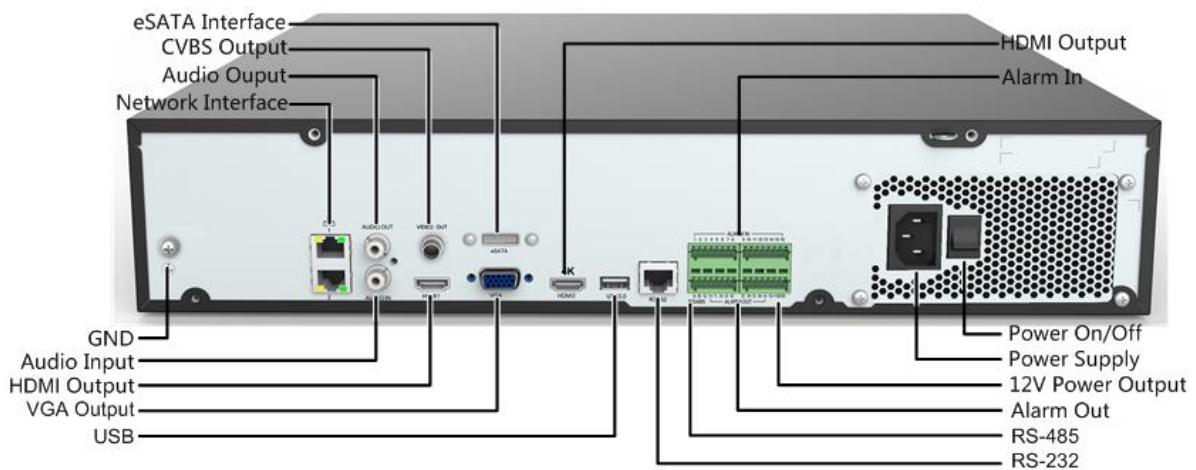

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.