


CP- TNW-HP4H1-6

5 Port Fast Ethernet Switch with 4 POE

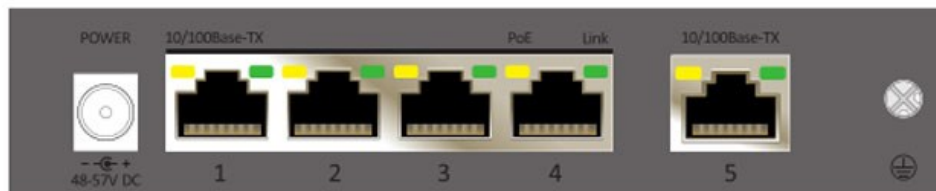

Main Features

- 4×10/100Base-TX Ethernet ports (PoE ports) and 1×10/100Base-TX up-link port
- Support IEEE802.3af/at standards, Max. 30W output of single port
- 1~4 downlink ports can only communicate with uplink ports, extend transmission distance up to 250m(10Mbps)
- 6KV surge protection, 8KV ESD immunity and anti-interference
- Easy and safe installation: wall-mounting, desktop, Kensington security slot , Plug-and-play

CP- TNW-HP4H1-6

5 Port Fast Ethernet Switch with 4 POE

Feature

Power Supply
Network Standard
Packet Forwarding Rate
Exchange Capacity
MAC Address List
Transmission Distance
Ethernet Speed
Packet Buffer
PoE Power Budget
Ethernet Port Light
Surveillance Module Light
Power Source
Operating Temperature
Power Consumption
Pluse Group
Storage Temperature
ESD
Anti-thunder Level
Humidity
Dimensions
Color
Weight
Power Light

Specification

Power Adaptor
Support IEEE 802.3/802.3u/IEEE802.3ab/IEEE802.3z/IEEE802.3x
0.74Mpps
1.0Gbps
2K
1-4 port: Default 0 100m , CCTV: 0~250m , UPLINK: 100m
1-4 port Default:10 100Mbps , CCTV:10Mbps , Uplink port 100Mbps
768K
60W
2pcs(Yellow&Green) on RJ45 yellow indicates PoE, green indicates Link Act
1pc(Green), green indicates CCTV
DC48V~54V
-10°C~55°C
<5W
Level 3 Standard: IEC61000 4 4
-40°C~85°C
Contact Discharge 6KV , Air Discharge Level 8KV , Standard: IEC61000-4-2
Common mode 6KV , Standard: IEC61000 4 5
0~95%
135mm x 85.6mm x 27mm
Gray
315g
1pc(Red)