


## CP- UVC-DA40L3

4 MP IR HDCVI Dome Camera - 30Mtr.

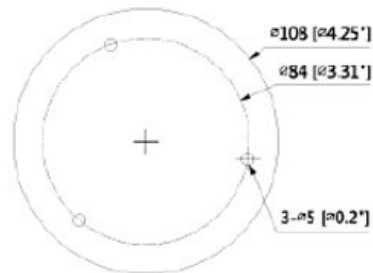

### Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 30fps@4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm, 6mm optional)
- OSD Menu, control over coaxial cable, 2D-DNR
- IR Range of 30 Mtrs., IP67
- HD and SD Output switchable



\*Product casing and specifications are subject to change without prior notice

# CP- UVC-DA40L3

4 MP IR HDCVI Dome Camera - 30Mtr.



## Feature

Image Sensor  
Minimum Illumination  
Effective Pixels  
Shutter Speed  
White Balance  
Gain Control (AGC)  
Lens  
Back Light Compensation  
Video Streaming  
Video Output  
ICR  
OSD  
IR  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

1/3" PS CMOS  
0.02Lux/F1.3, 30IRE, 0Lux IR on  
2560x1440, 4MP  
PAL: 1/25~1/100000s NTSC: 1/30~1/100000s  
Auto / Manual  
Auto/Manual  
3.6mm (2.8mm, 6mm Optional)  
BLC / HLC / DWDR  
25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P  
1-channel BNC high definition video output / CVBS video output (Can switch)  
Auto (ICR) / Manual  
Multi-language  
IR Range of 30 Mtr.  
-40°C~+60°C / Less than 90%RH  
12V DC ±25%  
Max 3.2W (12V DC, IR on)  
IP67  
Φ108mm x 84.9mm  
0.23kg