


# CP- UVC-TA40FR6

4 MP Array HDCVI Bullet Camera - 60 Mtr.

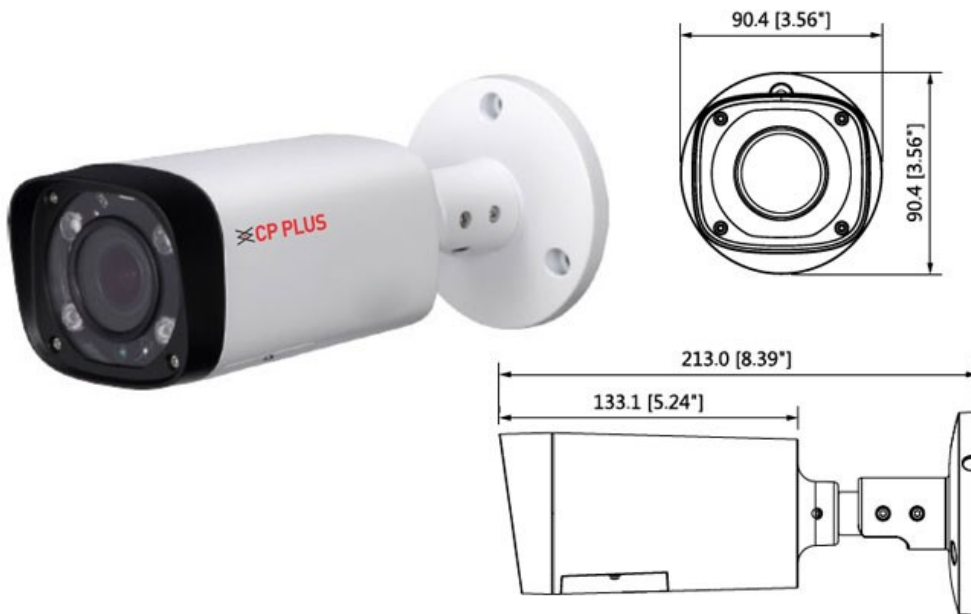

## Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max 30fps@4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 2.7mm-13.5mm Varifocal lens
- OSD Menu, control over coaxial cable, 2D-DNR
- Array Range of 60 Mtrs. , IP67
- HD and SD switchable



\*Product casing and specifications are subject to change without prior notice

# CP- UVC-TA40FR6

## 4 MP Array HDCVI Bullet Camera - 60 Mtr.



### Feature

Image Sensor  
Minimum Illumination  
Effective Pixels  
Shutter Speed  
White Balance  
Gain Control (AGC)  
Lens  
Back Light Compensation  
S/N Ratio  
Video Streaming  
Video Output  
ICR  
OSD  
IR  
No. of IR LEDs  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

### Specification

1/3" PS CMOS  
0.03Lux/F1.3, 30IRE, 0Lux IR on  
2560x1440, 4MP  
PAL: 1/25~1/100000s NTSC: 1/30~1/100000s  
Auto / Manual  
Auto/Manual  
2.7mm-13.5mm Varifocal Lens  
BLC / HLC / DWDR  
More than 65dB  
25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P  
1-channel BNC high definition video output / CVBS video output (Can switch)  
Auto (ICR) / Manual  
Multi-language  
Array Range of 60 Mtr.  
4pcs  
-40°C~+60°C / Less than 90%RH  
12V DC ±25%  
Max 7.6W (12V DC, IR on)  
IP67  
213.0mm x 90.4mm x 90.4mm  
0.63 kg