


CP- UVC-VB40ZL3-D

4 MP WDR IR HDCVI Vandal Dome Camera - 30 Mtr.

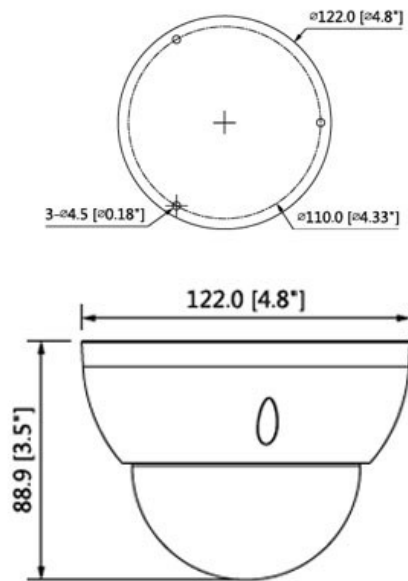

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max. 25fps@4MP
- WDR(120dB), Day/Night (ICR), 2D/3D DNR, AWB, AGC, BLC, HLC
- 2.7mm-12mm Motorized lens
- OSD Menu, control over coaxial cable, 2D/3D-DNR
- IR Range of 30 Mtrs., IP67, IK10
- HD and SD dual-output



*Product casing and specifications are subject to change without prior notice

CP- UVC-VB40ZL3-D

4 MP WDR IR HDCVI Vandal Dome Camera - 30 Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
S/N Ratio
Video Streaming
Video Output
ICR
OSD
IR
No. of IR LEDs
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" PS CMOS
0.01Lux/F1.3, 0Lux IR on
2560×1440 , 4MP
PAL: 1/4s~1/100,000s , NTSC: 1/3s~1/100,000s
Auto / Manual
Auto/Manual
2.7mm-12mm Motorized lens
BLC / HLC / WDR(120dB)
More than 65dB
25fps@4MP , 25/30fps@1080P , 25/30fps@720P
1-channel BNC HDCVI high definition video output & 1-channel BNC CVBS video output
Auto (ICR) / Manual
Multi-language
IR Range of 30 Mtr.
2pcs
-30°C~+60°C / Less than 90%RH
12V DC ±25%
Max 7.5W (12V DC, IR on)
IP67 , IK10
Φ122mm x 88.9mm (Φ4.8"×3.5")
0.47 kg