
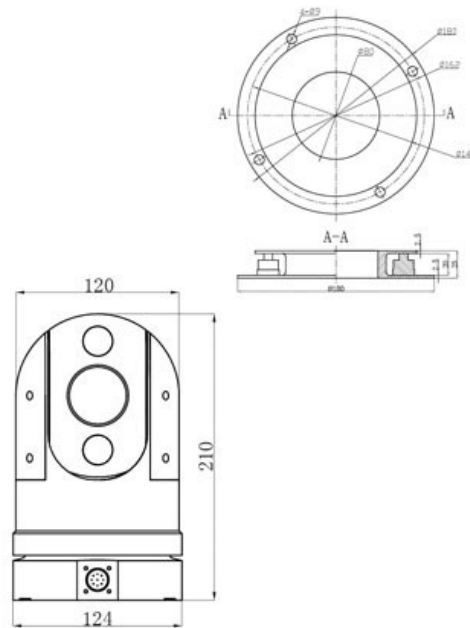



CP- UNP-3020R1

2 MP Full HD IP Mobile Portable PTZ Camera

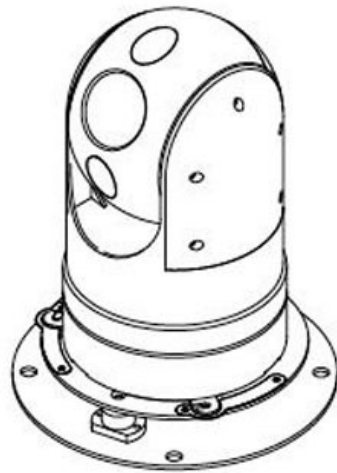

Main Features

- 1/2.8" Exmor CMOS Image Sensor
- 2MP Image Quality
- Powerful 30x Optical Zoom
- Pan range: 360° endless, speed up to 90°/s
- Up to 256 Presets, 8 Tour
- Supports Micro SD Card Upto 128 GB
- IR Distance up to 100 Mtr., IP66
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNP-3020R1

2 MP Full HD IP Mobile Portable PTZ Camera



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Day/Night: IR Cut Filter
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Pan Travel
Tilt Travel
Presets
Special Features
Video Compression
Video Streaming
Networking
Protocols
Operating Temperature
Memory
Max Remote Users
Smart Phone
Weather Proof Standard
Weight
Power Source
Power Consumption

Specification

1/2.8" Exmor CMOS
1944(H) x 1092(V), 2 Megapixels
More than 50dB
Color:0.005Lux/F1.6(Color), B/W:0Lux/F1.6
4.5mm ~ 135mm
Auto
Yes
H: 60°~2.40
1/1 ~ 1/30,000s
Yes
BLC / HLC /WDR(120dB)
30x
360° endless, 0.1° ~ 90°/sec;
-20° ~ 90°, 0.1° ~60°/sec
256
3D-DNR, Intelligent Defog, Up to 256 Presets, 8Tour, IR Range of 100 Mtr.
H.265 / H.264Baseline / H.264Main Profile / H.264High Profile / M-JPEG
Triple Stream Supported
RJ-45 (10/100Base-T)
IPv4/IPv6, HTTP, Qos, UPnP, ICMP, RTSP, RTP, SMTP, NTP, DNS, PPPOE, DDNS, FTP, ONVIF
-35°C ~ 60°C / Less than 90% RH
Max 128GB
20
iPhone, iPad, Android, Windows Phone
IP66
2.5Kg;
DC 12V
<12W(IR of), <24W (IR on)