
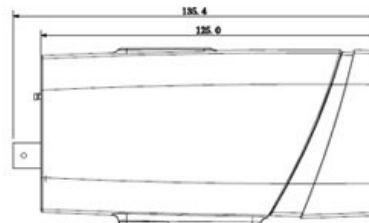


CP-UNC-BE13-MD

1.3 MP HD IP Box Camera



Main Features

- 1/3" 1.3Megapixel PS CMOS Image Sensor
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1.3M(1280×960)
- WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Supports PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-BE13-MD

1.3 MP HD IP Box Camera

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control(AGC)
 Video Compression
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Video Output
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Protocol
 Smart Detection
 Ethernet
 User Account
 Smart Phone
 Micro SD
 Operating Temperature
 Power Source
 Power Consumption
 Regulatory
 Dimension
 Weight

Specification

1/3" 1.3Megapixel CMOS
 0.01Lux/F1.2 (Color), 0.001Lux/F1.2(B/W)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Sunny/Night/Outdoor/Customized
 C/CS Mount Lens
 Auto/Manual
 H.264/H.264B/H.264H/ MJPEG
 BLC / HLC / WDR(120dB)
 More than 50 dB
 Main Stream:1.3M/720P(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P (1~25/30fps)
 1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480)/CIF(352
 1 channel BNC (1.0Vp-p, 75Ω)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 Ch.
 1 Ch.
 G.711a / G.711u/AAC
 2 Ch.
 1 Ch.
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S
 Tripwire, Intrusion, Abandoned/Missing, Scene Change, Audio detect, Face detect
 RJ-45 (10/100Base-T)
 20 users
 iPhone, iPad, Android, Windows Phone
 Micro SD, Max 128GB
 -30°C~+60°C, Less than 95% RH
 DC12V, PoE(802.3af)
 1 channel BNC (1.0Vp-p, 75Ω)
 CE, FCC and RoHS
 74.1mm× 65.5mm× 135.4mm
 0.3Kg