


CP-UNC-TA13L3**1.3 MP HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

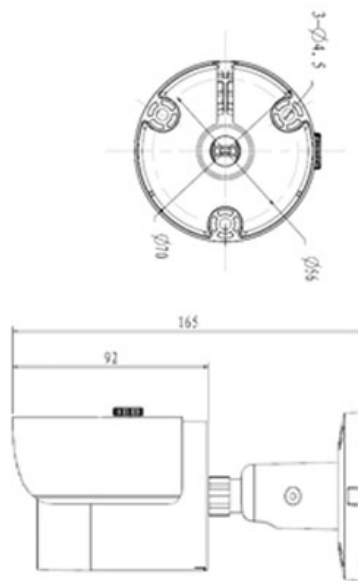

CP- UNC-TA13L3

1.3 MP HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 Back Light Compensation
 S/N Ratio
 Video Compression
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Protocol
 Ethernet
 NMS
 User Account
 Smart Phone
 IR
 Operating Temperature
 Power Source
 Power Consumption
 Weatherproof Standard
 Dimension
 Weight

Specification

1/3" 1.3MP Progressive scan CMOS
 0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
 Auto/Manual, 1s~1/100000s
 Auto/Manual
 Auto/Manual
 3.6mm(6mm optional)
 BLC/ HLC/ DWDR
 More than 50dB
 H.264/ H.264H/ H.264B/ MJPEG
 Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
 1.3M(1280x960) /720P(1280x720) / D1(704x576/704x480) /CIF(352x288/352x240)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI, SIP
 RJ-45 (10/100Base-T)
 Support
 20 Users
 iPhone, iPad, Android, Windows Phone
 IR Range of 30 Mtr.
 -30°C~+60°C , Less than 95%RH
 DC12V, PoE (802.3af)
 Max 3.8W
 IP67
 Ø154mm × 60mm × 59mm
 0.29Kg(with package 0.42Kg)