


CP-UNC-TA13L3-MW

1.3MP HD WiFi IR Bullet Camera - 30Mtr.

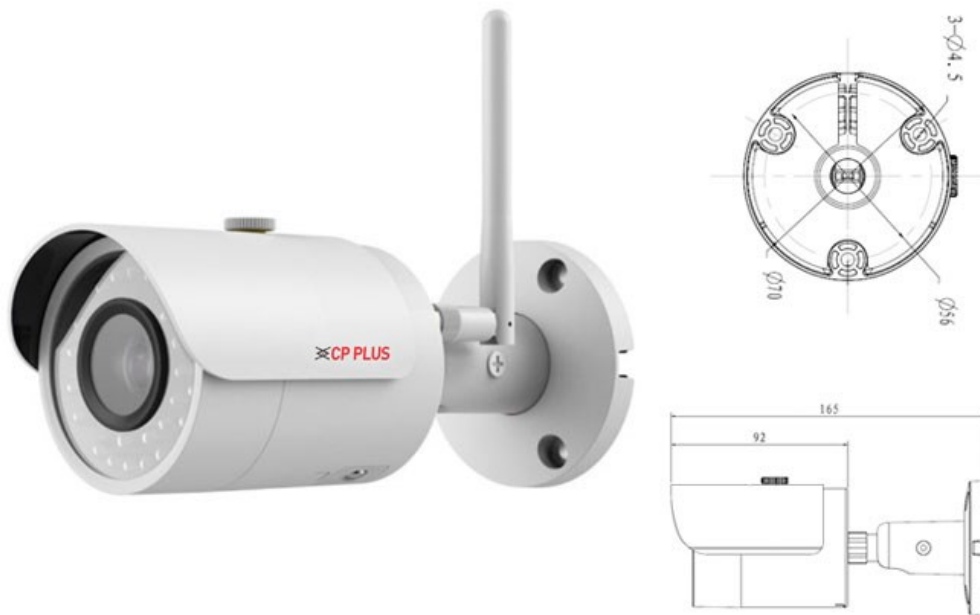

Main Features

- 1/3" 1.3MP PS CMOS Image Sensor
- Max25/30fps@1.3MP(1280×960)
- H.264 & MJPEG dual-stream encoding
- Wi-Fi support
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm Lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA13L3-MW

1.3MP HD WiFi IR Bullet Camera - 30Mtr.



Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Gain Control(AGC)

Lens

Back Light Compensation

Video Compression

S/N Ratio

Video Streaming

Resolution

Privacy Mask

ICR

Wireless

Protocol

Ethernet

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/3" 1.3MP Progressive scan CMOS

0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)

Auto/Manual, 1s~1/100000s

Auto/Manual

Auto/Manual

3.6mm (2.8mm optional)

BLC/ HLC/ DWDR

H.264/H.264H/H.264B/MJPEG

More than 50dB

Main Stream: 1.3MP/720P(1~25/30fps), Extra Stream: D1(1 ~ 25/30fps)

1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)

Up to 4 areas

Auto(ICR)/Color/B/W

Wi-Fi(IEEE802.11b/g/n), 50m(open field)

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android, Windows Phone

Max 128GB

-30°C~+60°C, Less than 95% RH

DC12V, PoE (802.3af)

<4.5W(IR ON)

IP67

Φ70mm × 165mm

0.38Kg(with package 0.44 Kg)