


CP-UNC-TA13L5-VM

1.3 MP HD IR Bullet Camera - 50Mtr.

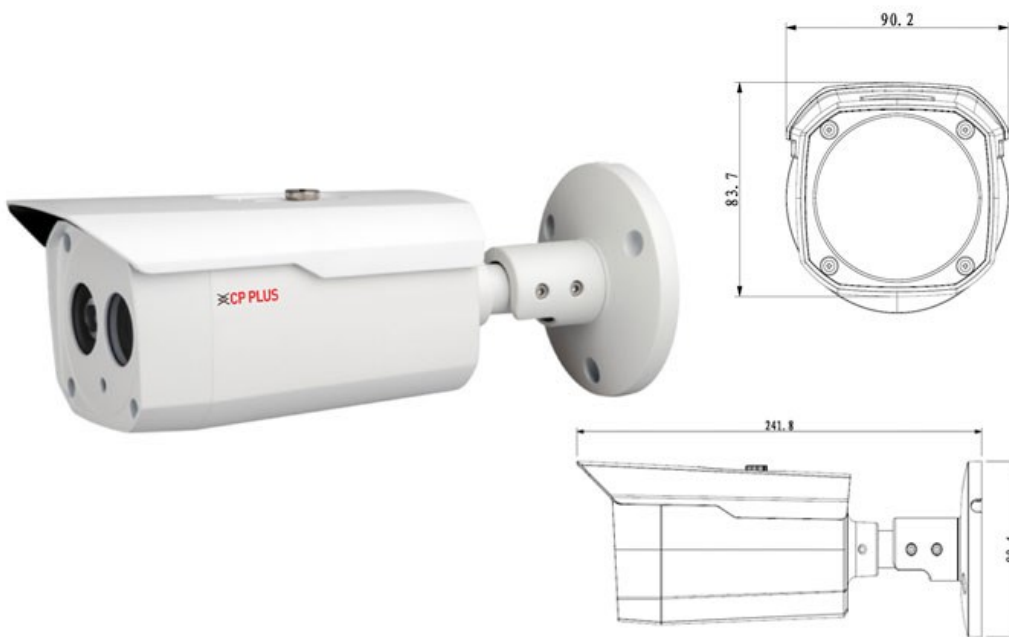

Main Features

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA13L5-VM

1.3 MP HD IR Bullet Camera - 50Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Back Light Compensation
 S/N Ratio
 Video Compression
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate

 Protocol

 Ethernet
 User Account
 Smart Phone
 IR
 Micro SD
 Operating Temperature
 Power Source
 Power Consumption
 Weatherproof Standard

Specification

1/3" 1.3MP Progressive scan CMOS
 0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
 Auto/Manual, 1/3(4)~1/100000s
 Auto/Sunny/Night/Outdoor/Customized
 3.6mm(6mm optional)
 Auto/Manual
 BLC/ HLC/ DWDR
 More than 50dB
 H.264/H.264H/ H.264B/ MJPEG
 Main Stream: 1.3M/720P(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps)
 1.3M(1280x960) /720P(1280x720) / D1(704x576/704x480) /CIF(352x288/352x240)
 Up to 4 areas
 Auto (ICR)/Color/B/W
 1 Channel
 1 Channel
 G.711a/ G.711u/ AAC
 1 Channel
 1 Channel
 H.264: 32K ~ 10Mbps

 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF Version 2.4, PSIA, CGI

 RJ-45 (10/100Base-T)
 20 Users
 iPhone, iPad, Android Phone
 IR Range of 50 Mtr.
 Max 128GB
 -30°C~+60°C , Less than 95%RH
 DC12V, PoE (802.3af)
 Max 3.7W
 IP67



CP- UNC-TA13L5-VM

1.3 MP HD IR Bullet Camera - 50Mtr.



Feature	Specification
Dimension	Φ90.4mm × 241.8mm
Weight	0.61kg