
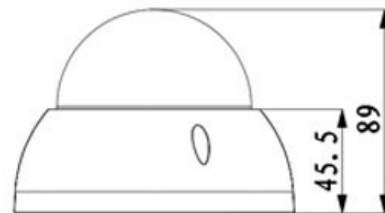


# CP- UNC-VB13FL3-MD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.

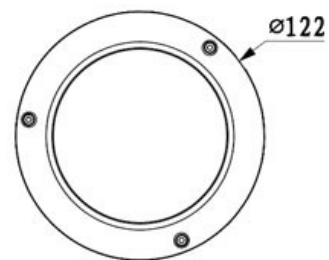

## Main Features

- 1/3"1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night (ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VB13FL3-MD

## 1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



### Feature

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
Video Compression  
S/N Ratio  
Back Light Compensation  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
Protocol  
Ethernet  
User Account  
IR  
Smart Phone  
Micro SD  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

### Specification

1/3" 1.3MP Progressive scan CMOS  
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)  
Auto/Manual, 1/3(4)~1/10000s  
Auto/Manual  
2.7 -12mm Varifocal Lens  
Auto/Manual  
H.264/MJPEG  
More than 50dB  
BLC/ HLC/ WDR(120dB)  
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)  
Up to 4 areas  
Auto (ICR)/Color/B/W  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
RJ-45 (10/100Base-T)  
20 Users  
IR Range of 30 Mtr.  
iPhone, iPad, Android, Windows Phone  
Micro SD, Max 64GB  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<4W  
IP66 & IK10  
φ122mm × 89mm  
500g