
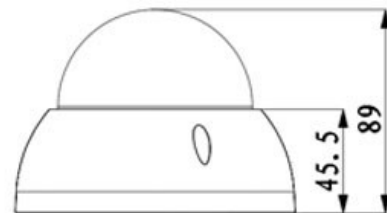


CP-UNC-VB13FL3-VM

1.3 MP HD IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VB13FL3-VM

1.3 MP HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Alarm IN
Alarm Out

Specification

1/3" 1.3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7 -12mm Varifocal Lens
BLC/ HLC/ DWDR
More than 50dB
H.264/MJPEG
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 channel
1 channel
1 channel
1 channel

Protocol

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Ethernet

RJ-45 (10/100Base-T)

User Account

20 Users

IR

IR Range of 30 Mtr.

Smart Phone

iPhone, iPad, Android, Windows Phone

Micro SD

Micro SD , Max 128GB

Operating Temperature

-30°C~+60°C , Less than 95%RH

Power Source

DC12V, PoE (802.3af)

Power Consumption

<5W

Weatherproof Standard

IP67 & IK10

Dimension

φ122mm × 89mm

Weight

500g



*Product casing and specifications are subject to change without prior notice