
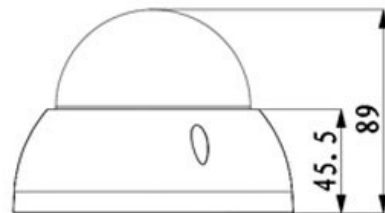


CP-UNC-VB13FL3-VMD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VB13FL3-VMD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Gain Control(AGC)
 Lens
 S/N Ratio
 Video Compression
 Back Light Compensation
 Video Streaming
 Resolution
 Privacy Mask
 ICR
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out

Specification

1/3" 1.3MP Progressive scan CMOS
 0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)
 Auto/Manual, 1/3(4)~1/10000s
 Auto/Manual
 Auto/Manual
 2.7 -12mm Varifocal Lens
 More than 50dB
 H.264/MJPEG
 BLC/ HLC/ WDR(120dB)
 Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
 Up to 4 areas
 Auto(ICR)/Color/B/W
 1 Ch.
 G.711a / G.711u
 1 Ch.
 1 Ch.
 1 Ch.

Protocol
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

Ethernet
 RJ-45 (10/100Base-T)

User Account
 20 Users

Smart Phone
 iPhone, iPad, Android, Windows Phone

IR
 IR Range of 30 Mtr.

Micro SD
 Micro SD, Max 128GB

Operating Temperature
 -30°C~+60°C , Less than 95%RH

Power Source
 DC12V, PoE (802.3af)

Power Consumption
 <4W

Weatherproof Standard
 IP67 & IK10

Dimension
 φ122mm × 89mm

Weight
 500g



*Product casing and specifications are subject to change without prior notice