
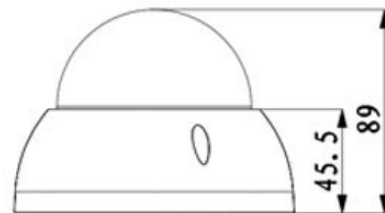


# CP-UNC-VB13ZL3-VMD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



## Main Features

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.7 -12mm Motorized Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



[www.activesystemintegration.com](http://www.activesystemintegration.com)

9994126666



# CP- UNC-VB13ZL3-VMD

1.3 MP HD WDR IR Vandal Dome Camera - 30Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Gain Control (AGC)  
 Lens  
 Back Light Compensation  
 S/N Ratio  
 Video Compression  
 Video Streaming  
 Resolution  
 Privacy Mask  
 ICR  
 Audio Input  
 Audio Compression  
 Audio Output  
 Alarm IN  
 Alarm Out  
  
 Protocol  
 Ethernet  
 User Account  
 IR  
 Smart Phone  
 Micro SD  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Weatherproof Standard  
 Dimension  
 Weight

## Specification

1/3" 1.3MP Progressive scan CMOS  
 0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Manual  
 Auto/Manual  
 2.7 -12mm Motorized Lens  
 BLC/ HLC/ WDR(120dB)  
 More than 50dB  
 H.264/MJPEG  
 Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
 1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)  
 Up to 4 areas  
 Auto (ICR)/Color/B/W  
 1 Ch.  
 G.711a / G.711u  
 1 Ch.  
 1 Ch.  
 1 Ch.  
  
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 30 Mtr.  
 iPhone, iPad, Android Phone  
 Micro SD, Max 128GB  
 -30°C~+60°C , Less than 95%RH  
 DC12V, PoE (802.3af)  
 <7.5W  
 IP67 & IK10  
 φ122mm × 89mm  
 500g



\*Product casing and specifications are subject to change without prior notice