
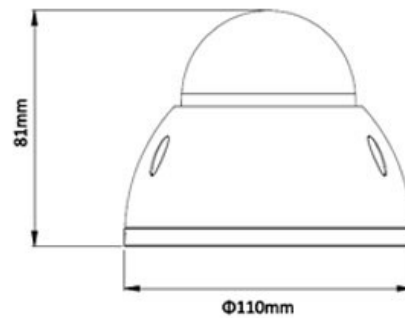


CP-UNC-VD13L3-M

1.3 MP HD IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/3" 1.3Megapixel PS CMOS Image Sensor
- Max 25/30fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP-UNC-VD13L3-M

1.3 MP HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 1.3Megapixel progressive scan CMOS
0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm(2.8mm, 6mm optional)
BLC / HLC / DWDR
More than 50dB
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
1.3M(1280x960)/720P(1280x 720)/ D1(704x 576/704x 480) /CIF(352x 288/352x 240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Ch.
G.711a / G.711u / PCM
1 Ch.
1 Ch.
1 Ch.
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Face detect
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
Micro SD, Max 128GB
-40°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
Max 4W
IP67 & IK10
Ø110mm × 81mm
0.33kg(with package 0.47kg)



*Product casing and specifications are subject to change without prior notice