
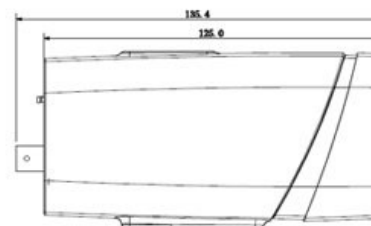


CP- UNC-BH4K12-VM

12 MP 4K IP Box Camera



Main Features

- 1/1.7" 12MP PS CMOS Image Sensor
- 20fps@12M(4000×3000), 25/30fps@4K(3840×2160)
- H.265 and H.264 triple-stream encoding
- Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Auto back focus (ABF)
- Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-BH4K12-VM

12 MP 4K IP Box Camera



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Focus
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Frame Rate
 Video Output
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Alarm Event
 Bit Rate
 Interface
 Protocol

Specification

1/1.7" 12MP progressive scan CMOS
 4000(H) x 3000(V)
 0.005Lux/F1.2 (Color), 0.003Lux/F1.2 (B/W)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 C/CS Mount
 Auto/Manual
 Auto/Manual
 H.265+/H.265/H.264+/H.264/MJPEG
 More than 50dB
 BLC / HLC / SSA / WDR
 Unicast/Multicast
 Main Stream: 12M(1~20fps)/ 4K(1~25/30fps) , Sub Stream: D1 (1 ~ 25/30fps) , Third Stream: 1080P(1~25/30fps)
 1 Channel
 12M(4000x3000)/ 4K(3840x2160)/ 6M(3072x2048)/ 5M(2560x1920)/ 3M(2048x1536)
 16x
 Off / On (4 Zone, Rectangle)
 Up to 4 areas
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 Ch.
 1 Ch.
 G.711a/ G.711Mu/ AAC/ G.726
 2 Ch.
 1 Ch.
 Events / alerts, Video loss, Video Tempering, send via FTP, HTTP, email, Pre-Post alarm video buffering
 H.265: 14~ 9984Kbps, H.264: 24~ 16384Kbps
 1 RS485
 HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF (Profile S/G), PSIA, CGI



*Product casing and specifications are subject to change without prior notice

CP- UNC-BH4K12-VM

12 MP 4K IP Box Camera



Feature

General Function

Smart Detection

Ethernet

User Account

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Dimension

Weight

Specification

One-key reset, Anti-Flicker, mirror, password protection, Watermark, IP address filtering , HTTPS encryption, IEEE 802.1X

Tripwire, Intrusion, Object Abandoned/Missing, Scene change, Face Detection, People Counting, Heat Map

RJ-45 (100/1000Base-T)

10/ 20 Users

iPhone, iPad, Android Phone

Micro SD, Max 128GB

-30°C~+60°C, Less than 95% RH

DC12V/AC24V, PoE (802.3af)

<8W

135.4mm x 74.4mm x 65.5mm

0.66Kg