
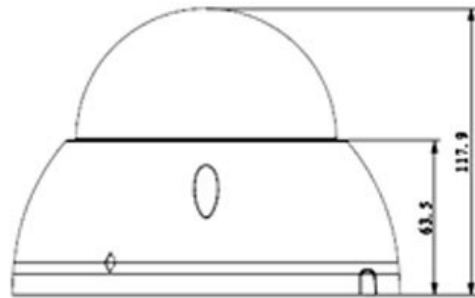


CP- UNC-VH4K12ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Main Features

- 1/1.7" 12Megapixel progressive scan CMOS
- Max 15fps@12 MP, 25/30fps@4K
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 4.1mm ~16.4mm motorized lens
- IR Range of 50 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VH4K12ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Video Output
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone
Micro SD

Specification

1/1.7" 12Megapixel progressive scan CMOS
0.05Lux/F1.4(Color); 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Sunny/Night/Outdoor/Customized
4.1mm~16.4mm
Auto/Manual
BLC / HLC / DWDR
H.264/H.264B/H.264H/ MJPEG
More than 50dB
Main Stream: 12M(1~15fps)/8M(3840x2160) (1~25/30fps), Sub Stream :D1/CIF(1 ~ 25/30fps),Third Stream:1080P/720P/D1(1 ~ 25/30fps)
1 Port
12M(4000x3000)/8M(4096x2160)/8M(3840x2160)/1080P(1920x1080)/720P(1280x720) /D1 (704x576) /CIF(352x288)
Up to 4 areas
Auto (ICR)/Color/B/W
1 Channel
1 Channel
G.711a/ G.711u/ AAC
1 Channel
1 Channel
IPV4/IPV6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF,PSIA,CGI
Tripwire, Intrusion, Scene change Missing/Abandoned Audio detect, Defocus detect, Face detect
RJ-45 (10/100Base-T)
20 Users
IR Range of 50 Mtr.
iPhone, iPad, Android Phone
Micro SD, Max 128GB



*Product casing and specifications are subject to change without prior notice

CP- UNC-VH4K12ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Feature

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

-30°C~+60°C, Less than 95% RH
DC12V/AC24V, PoE (802.3at)
<24W (with IR on, motorized lens working)
IP67 & IK10
Φ159mm × 117.9mm
1.1kg