
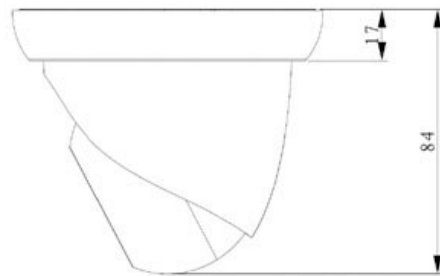


CP- UNC-DA10L3S**1 MP HD IP Dome Camera - 30Mtr.****Main Features**

- 1/4" 1MP PS CMOS Image Sensor
- Max 25/30fps@720P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

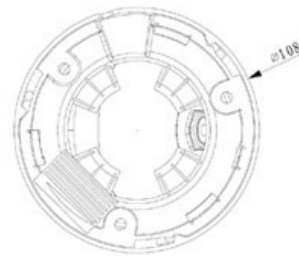

*Product casing and specifications are subject to change without prior notice

CP- UNC-DA10L3S

1 MP HD IP Dome Camera - 30Mtr.



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/4" 1MP Progressive scan CMOS
1280(H) x 720(V)
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3s~1/30000s
Auto/Manual
3.6mm fixed lens (2.8mm optional)
Auto/Manual
BLC/ HLC/ DWDR
H.264/H.264H/ H.264B/MJPEG
More than 50dB
Main Stream: 720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
Auto (ICR)/Color/B/W
HTTP;TCP;ARP;RTSP;RTP;UDP;SMTP;FTP;DHCP;DNS;DDNS;IPv4/v6;QoS;UPnP;NTP, ONVIF, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android Phone
IR Range of 30 Mtr.
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4W(IR on)
IP67
Φ84mm×108mm
0.23Kg(with package 0.387Kg)