
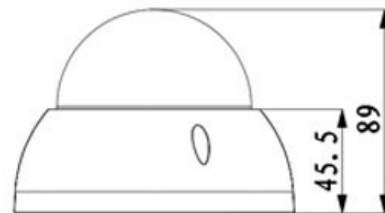



# CP-UNC-VA10L3S

1 MP HD IP Vandal Dome Camera - 30Mtr.

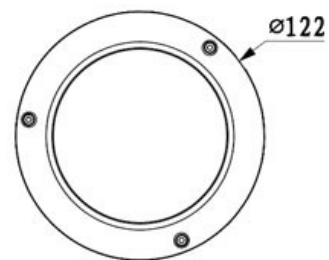

## Main Features

- 1/4" 1MP PS CMOS Image Sensor
- Max 25/30fps@720P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

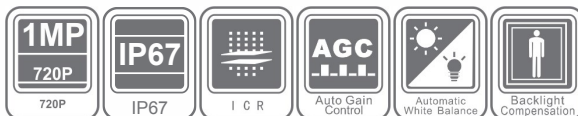

\*Product casing and specifications are subject to change without prior notice

# CP- UNC-VA10L3S

1 MP HD IP Vandal Dome Camera - 30Mtr.



## Feature

Image Sensor  
Minimum Illumination  
Effective Pixels  
Shutter Speed  
White Balance  
Gain Control (AGC)  
Lens  
Video Compression  
Back Light Compensation  
S/N Ratio  
Video Streaming  
Resolution  
Privacy Mask  
ICR  
  
Protocol  
  
Ethernet  
User Account  
Smart Phone  
IR  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

1/4" 1MP Progressive scan CMOS  
0. 1Lux/F2.0 (Color), 0Lux/F2.0(IR on)  
1280(H) x 720(V)  
Auto/Manual, 1/3(4)~1/100000s  
Auto/Manual  
Auto/Manual  
2.8 mm (3.6 mm optional)  
H.264/ H.264H/ MJPEG  
BLC/ HLC/ DWDR  
More than 50dB  
Main Stream: 720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)  
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)  
Up to 4 areas  
Auto (ICR)/Color/B/W  
  
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, CGI  
  
RJ-45 (10/100Base-T)  
20 Users  
iPhone, iPad, Android Phone  
IR Range of 30 Mtr.  
-30°C~+60°C , Less than 95%RH  
DC12V, PoE (802.3af)  
<4.5W  
IP67 & IK10  
Φ110mm x 81mm  
0.33kg(with package 0.47kg)