
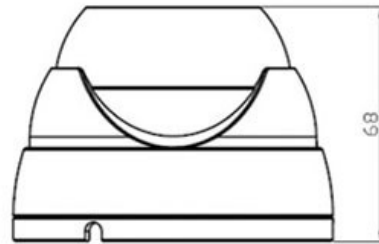


# CP- ENC-D21L3-DS

2 MP Full HD WDR Network IR Dome Camera - 30Mtr.

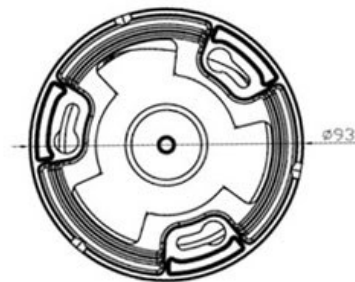

## Main Features

- 1/2.7" 2MP CMOS Image Sensor
- Max 25fps@2MP
- H.265/ H.264 Video Compression
- WDR(100dB), Day/Night (ICR), AWB, AGC, BLC
- 3.6mm lens (6mm optional)
- IR Range of 30 Mtrs, IP66
- Mobile Software: cMOB-20
- CMS Software: RVMS Pro



\*Product casing and specifications are subject to change without prior notice

# CP- ENC-D21L3-DS

2 MP Full HD WDR Network IR Dome Camera - 30Mtr.



## Feature

Image Sensor  
Minimum Illumination  
White Balance  
Gain Control (AGC)  
Lens  
Back Light Compensation  
Video Compression  
Video Streaming  
Resolution  
Frame Rate  
ICR  
WDR  
Protocol  
Ethernet  
IR  
Smart Phone  
Operating Temperature  
Power Source  
Weatherproof Standard  
Dimension  
Weight

## Specification

1/2.7" 2MP CMOS Image Sensor  
0.01Lux@F1.2(Color)/0.001Lux@F1.2(B/W)  
Auto/Manual  
Auto/Manual  
3.6mm Lens (6mm optional)  
Auto/Manual  
H.265 / H.264  
Dual Stream  
1080P(1920×1080) / 720P(1280×720) / D1(704×576) / CIF(352×288)  
Main Stream : 1080P@25fps , Sub-Stream: D1  
IR CUT  
WDR (100dB)  
ONVIF Support (profile S)  
RJ-45 (10/100Base-T)  
IR Range of 30 Mtr.  
iPhone, iPad, Android  
-20°C~+65°C  
DC12V±10%, PoE  
IP66  
93mm x 68mm  
315g



\*Product casing and specifications are subject to change without prior notice