



CP- ENC-V21ZL4-VMDS

2 MP Full HD WDR IR Vandal Dome Camera - 40Mtr.

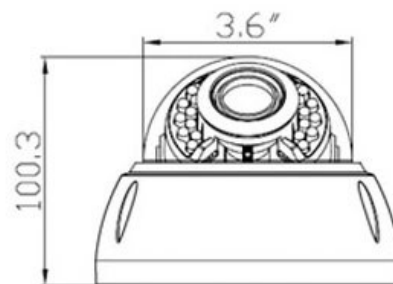

Main Features

- 1/2.7" 2MP CMOS Image Sensor
- Max 25fps@1080P
- H.265/H.264 Video Compression
- WDR(100dB), Day/Night (ICR), AWB, AGC, BLC
- 2.8~12mm motorized lens
- IR Range of 40 Mtrs, IP66, SD Card
- Mobile Software: cMOB-20
- CMS Software: RVMS Pro



*Product casing and specifications are subject to change without prior notice

CP- ENC-V21ZL4-VMDS

2 MP Full HD WDR IR Vandal Dome Camera - 40Mtr.



Feature

Image Sensor
Minimum Illumination
White Balance
Lens
Gain Control (AGC)
Video Compression
Back Light Compensation
Video Streaming
Resolution
Frame Rate
ICR
Audio Input
Audio Output
Alarm IN
Alarm Out
WDR
Protocol
Smart Detection
Ethernet
IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2MP CMOS
0.01Lux@F1.2(Color)/0.001Lux@F1.2(B/W)
Auto/Manual
2.8~12mm motorized lens
Auto/Manual
H.265/H.264
Auto/Manual
Dual Stream
1080(1920×1080) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)
Main Stream :1080P@25fps , Sub-Stream: D1
IR CUT
1 Channel
1 channel
2 Channel
1 Channel
WDR(100dB)
ONVIF Support (profile S)
Tripwire, Intrusion, Scene Change, Abandoned / Missing Object
RJ-45 (10/100Base-T)
IR Range of 40 Mtr.
iPhone, iPad, Android
SD Card, Max 32G
-20°C~+65°C
DC12V±10%, PoE
IP66
133mm x 100.3mm
455g