
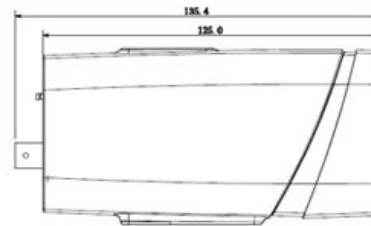


CP- UNC-BE20-MD**2 MP Full HD WDR IP Box Camera****Main Features**

- 1/2.7" 2Megapixel PS CMOS Image Sensor
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Supports PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-BE20-MD

2 MP Full HD WDR IP Box Camera



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Video Output
Resolution
Motion detection
Privacy Mask
ICR
ROI
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out

Protocol

Smart Detection
Ethernet
User Account
Smart Phone
Micro SD
Special Features

Specification

1/2.7" 2 Megapixel CMOS
1920(H) x 1080(V), 2 Megapixels
0.01Lux/F1.2(Color), 0.001Lux/F1.2(B/W)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
Auto/Manual
C/CS Mount Lens
BLC / HLC / WDR(120dB)
H.264/H.264H/H.264B/MJPEG
More than 50 dB
Main Stream:1080P/720P(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-13/4fps)
1 channel BNC (1.0Vp-p, 75Ω)
1080P(1920×1080)/720P(1280×720)/D1(704×576)/CIF(352×288)
Support
Up to 4 areas
Auto(ICR)/Color/B/W
Up to 4 areas
1 Ch.
1 Ch.
G.711a/ G.711u/ AAC
2 Ch.
1 Ch.

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.x, ONVIF Profile S, PSIA, CGI

Tripwire, Intrusion, Scene Change, Face Detect, Audio Detect, Abandoned/Missing Object
RJ-45 (10/100Base-T)
20 users
iPhone, iPad, Android, Windows Phone
Micro SD, Max 128GB
Defog & Autoback Focus



*Product casing and specifications are subject to change without prior notice

CP- UNC-BE20-MD

2 MP Full HD WDR IP Box Camera



Feature

Operating Temperature
Power Source
Power Consumption
Regulatory
Dimension
Weight

Specification

-30°C~+60°C, Less than 90% RH
DC12V, PoE(802.3af)
Max 10W (ABF & ICR on)
CE, FCC and RoHS
74.1mm × 65.5mm × 135.4mm
0.3kg