


# CP- UNC-DD21L3-D

2 MP Full HD IR Dome Camera - 30Mtr.

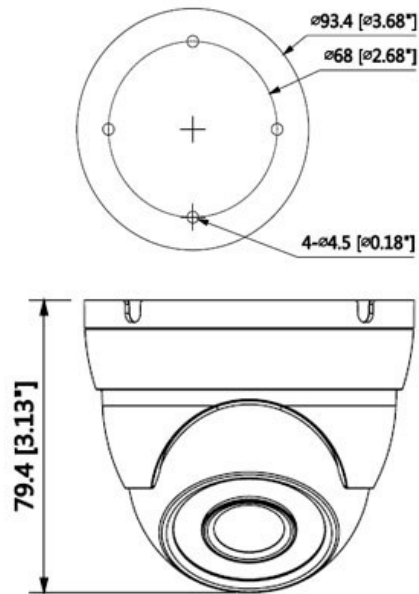

## Main Features

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max 50/60fps@1080P
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-DD21L3-D

2 MP Full HD IR Dome Camera - 30Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Gain Control (AGC)  
 Lens  
 Back Light Compensation  
 Video Compression  
 S/N Ratio  
 Video Streaming  
 Resolution  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 IR  
 Smart Phone  
 Micro SD  
 Operating Temperature  
 Power Source  
 Power Consumption  
 Weatherproof Standard  
 Dimension  
 Weight

## Specification

1/2.8" 2Megapixel progressive scan CMOS  
 0.009Lux/F2.0 (Color), 0Lux/F2.0 (IR on)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 Auto/Manual  
 3.6mm(6mm optional)  
 BLC / HLC / WDR(120dB)  
 H.265+/H.265/H.264+/H.264  
 More than 50dB  
 Main Stream: 1080P(1~50/60fps), Sub Stream: D1(1~50/60fps), Third Stream: 1080P(1~25/30fps)  
 1080P(1920× 1080)/ 720P(1280× 720) / D1(704× 576/704× 480)/ CIF(352× 288/352× 240)  
 Off / On (4 Zone, Rectangle)  
 Up to 4 areas  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 H.264: 24~9472Kbps, H.265: 14~5632Kbps  
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Object Abandoned/Missing, Face detect  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 30 Mtr.  
 iPhone, iPad, Android  
 Max 128GB  
 -30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH  
 DC12V, PoE (802.3af)  
 <6W  
 IP67  
 Ø93.4mm × 79.4mm (3.68"×3.13")  
 0.3Kg (0.66lb)

