


CP-UNC-TA20L3S

2MP HD IP Bullet Camera - 30Mtr.

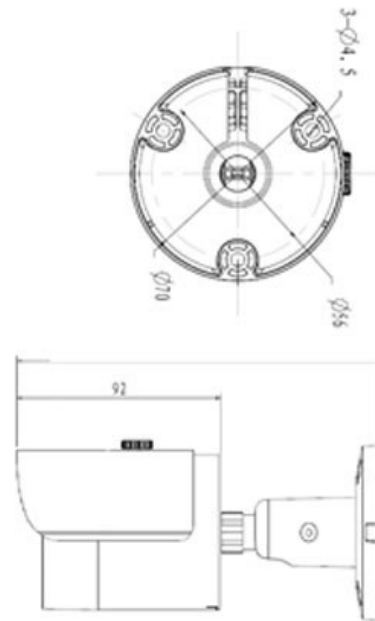

Main Features

- 1/2.7" 2Megapixel progressive scan CMOS
- 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- Array Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA20L3S

2MP HD IP Bullet Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Resolution
Frame Rate
Privacy Mask
ICR
Protocol
Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2Megapixel progressive scan CMOS
0. 1Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
3.6mm fixed lens (6mm optional)
Auto/Manual
BLC/ HLC/ DWDR
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)
Main Stream :1080P(1 ~ 25/30fps),Sub Stream :D1(1 ~ 25/30fps)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4.8W(IR on)
IP67
Φ70mm×165mm
0.38Kg(with package 0.44 Kg)