


CP- UNC-TA20L5-VM

2 MP Full HD IR Bullet Camera - 50Mtr.

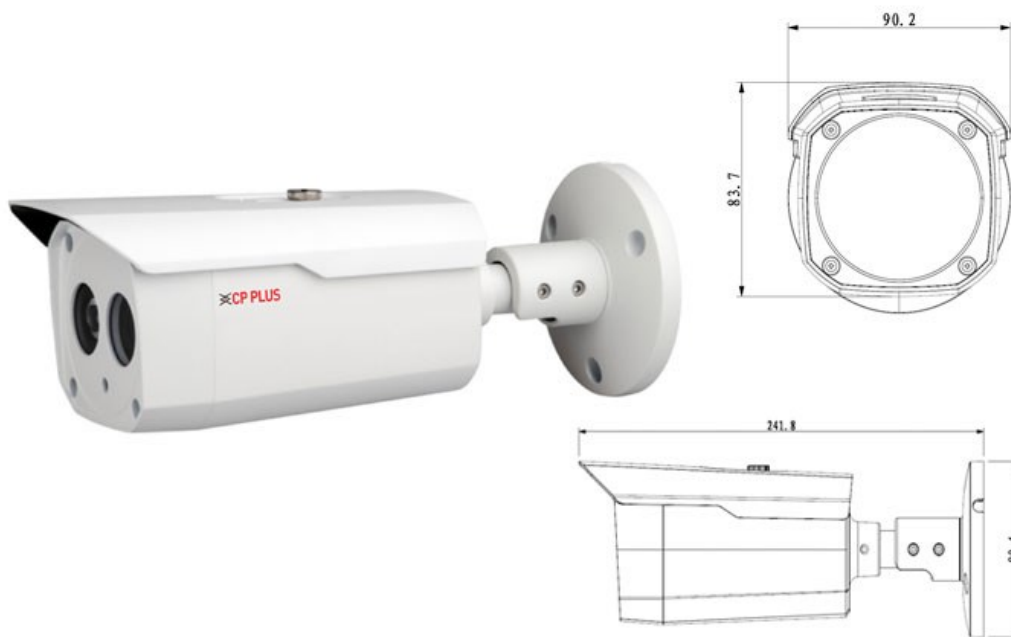

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 50 Mtrs, IP67, PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA20L5-VM

2 MP Full HD IR Bullet Camera - 50Mtr.



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
Bit Rate
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption

Specification

1/2.7" 2MP Progressive scan CMOS
1920(H) x 1080(V)
0. 1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Sunny/Night/Outdoor/Customized
Auto/Manual
3.6mm (6mm optional)
BLC/ HLC/ DWDR
H.264/H.264H/H.264B
More than 50dB
Main Stream:1080P(1 ~ 25/30fps), Extra Stream: D1 (1 ~ 25/30fps)
1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)
Up to 4 areas
Auto (ICR)/Color/B/W
1 Channel
G.711a/ G.711u/ AAC
1 Channel
1 Channel
1 Channel
H.264: 32Kbps~10Mbps
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour,802.1x, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android Phone
IR Range of 50 Mtr.
Micro SD, Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 3.7W



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA20L5-VM

2 MP Full HD IR Bullet Camera - 50Mtr.



Feature

Weatherproof Standard

Dimension

Weight

Specification

IP67

Φ90.4mm x 241.8mm

0.61Kg