
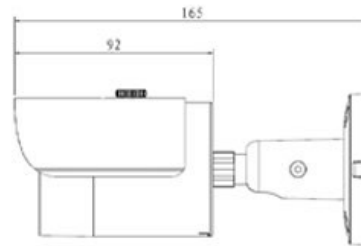


CP-UNC-TA21L3

2 MP Full HD IR Bullet Camera - 30Mtr.

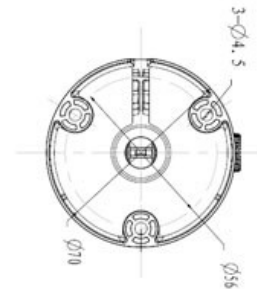

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TA21L3

2 MP Full HD IR Bullet Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Bit Rate

Protocol

Ethernet
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
1920(H) x 1080(V), 2 Megapixels
Auto/Manual, 1s~1/100000s
Auto/Manual
Auto/Manual
3.6mm (6mm optional)
BLC/ HLC/ DWDR
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
Main Stream: 1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
H.264: 4kbps~8192bps

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C, Less than 95%RH
DC12V, PoE (802.3af)
<4.8W(IR on)
IP67
Ø70mmx165mm
0.38Kg(0.44 with packaging)