


CP- UNC-TB21ZL6S-VMD

2MP Full HD WDR IR Network Bullet Camera - 60Mtr.

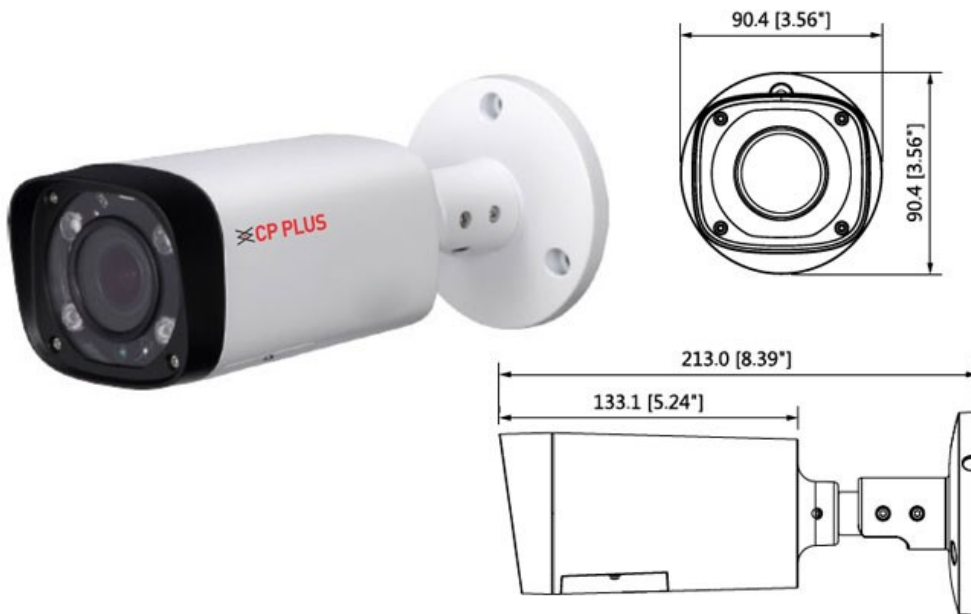

Main Features

- 1/2.8" 2MP Progressive Scan CMOS
- Max. 25/30fps@2MP (1920×1080)
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 2.7~13.5mm Motorized Lens
- IR Range of 60 Mtrs, Smart IR, IP67, PoE, SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TB21ZL6S-VMD

2MP Full HD WDR IR Network Bullet Camera - 60Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Back Light Compensation
 S/N Ratio
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Ethernet
 User Account
 Smart Phone
 IR
 Micro SD
 Operating Temperature

Specification

1/2.8" 2MP PS CMOS
 1920(H)x1080(V)
 0.006Lux/F1.4(Color,1/3s,30IRE) 0.05Lux/F1.4(Color,1/30s,30IRE) 0Lux/F1.4(IR on)
 Auto/Manual, 1/3(4)~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.7mm~13.5mm Motorized Lens
 Auto/Manual
 H.265+/H.265/H.264+/H.264
 BLC / HLC / WDR(120dB)
 More than 45dB
 2MP (1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps)
 1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x 960)/720P(1280x720)/D1
 (704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 channel In
 1 channel Out
 G.711A;G.711Mu;G.726;AAC
 1 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.265: 12K ~ 6400Kbps , H.264: 32K ~ 10240Kbps
 HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP ;DNS;DDNS;PPPOE; IPv4/v6; SNMP; QoS;
 UPnP; NTP; ONVIF, PSIA, CGI
 RJ-45 (10/100Base-T)
 20 Users
 iPhone, iPad, Android Phone
 IR Range of 60 Mtr., Smart IR
 Micro SD , Max 128GB
 -30°C~+60°C , Less than 95%RH



*Product casing and specifications are subject to change without prior notice

CP- UNC-TB21ZL6S-VMD

2MP Full HD WDR IR Network Bullet Camera - 60Mtr.



Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

DC12V, PoE (802.3af)

<11.4W

IP67

72mm x 80mm x 212.8mm

0.685Kg