


CP- UNC-TE21ZL20-VMD

2 MP Full HD WDR Network IR Bullet Camera - 200 Mtr.

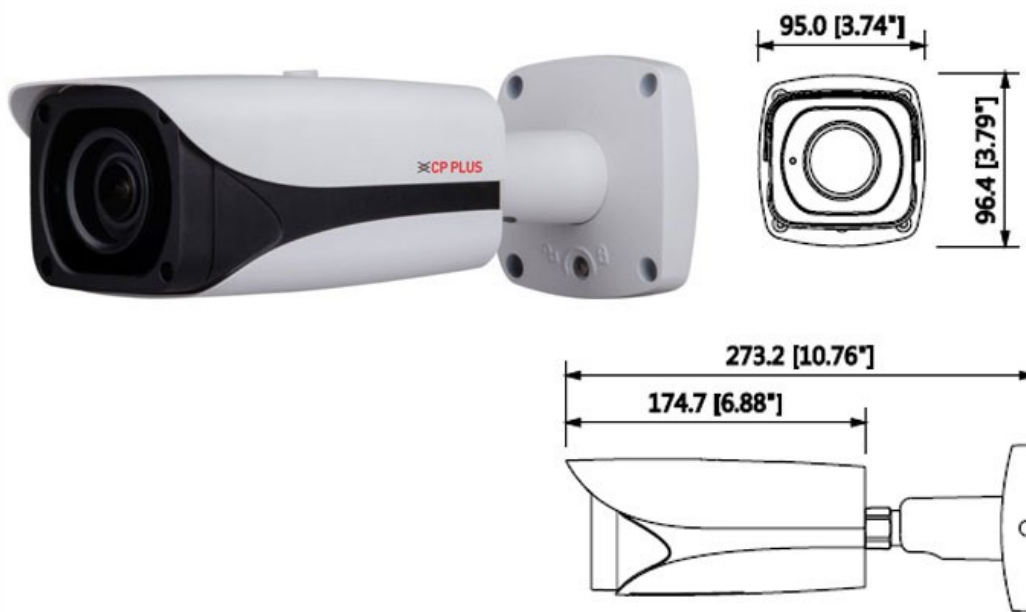

Main Features

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- H.265 and H.264 triple-stream encoding
- Max 50/60fps@1080(1920×1080)
- WDR(120dB), Day/Night (ICR), 3D-DNR, AWB, AGC, BLC
- IR Range of 200 Mtrs.
- 5.3mm ~64mm Motorized lens , 12x Optical zoom
- 2/1 Alarm in/out, 1/1 audio in/out
- Supports PoE, IP67, Micro SD Card
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TE21ZL20-VMD

2 MP Full HD WDR Network IR Bullet Camera - 200 Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Input
 Video Streaming
 Resolution
 Digital Zoom
 Optical Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account

Specification

1/2.8" 2 Megapixel PS CMOS
 1920(H) x 1080(V)
 0.006Lux/F1.4 (Color,1/3s,30IRE) 0.05Lux/F1.4 (Color,1/30s,30IRE) 0Lux/F1.4 (IR on)
 Auto/Manual, 1/3(4)~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 5.3mm~64mm Motorized Lens
 Auto/Manual
 H.265+/H.265/H.264+/H.264
 More than 50 dB
 BLC / HLC / WDR(120dB)
 1 Port
 Main Stream: 1080P(1~50/60fps) , Sub Stream: D1(1~50/60fps) , Third Stream: 1080P
 (1~25/30fps)
 1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA
 (640x480)/CIF(352x288/352x240)
 16x
 12x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 Ch.
 1 Ch.
 G.711a/ G.711Mu/ AAC/ G.726
 2 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.264: 24~9472Kbps , H.265: 14~5632Kbps
 HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS;
 UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection
 RJ-45 (10/100Base-T)
 20 users



CP- UNC-TE21ZL20-VMD

2 MP Full HD WDR Network IR Bullet Camera - 200 Mtr.



Feature

IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

IR Range of 200 Mtr.
iPhone, iPad, Android Phone
Micro SD, Max 128GB
-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
DC12V, PoE(802.3af)
<11.5W
IP67
273.2mm x95.0mm x 96.4mm
1.07Kg