


CP- UNC-TH21ZL5-VMD

2 MP H.265 WDR IR Bullet Camera - 50 Mtr.

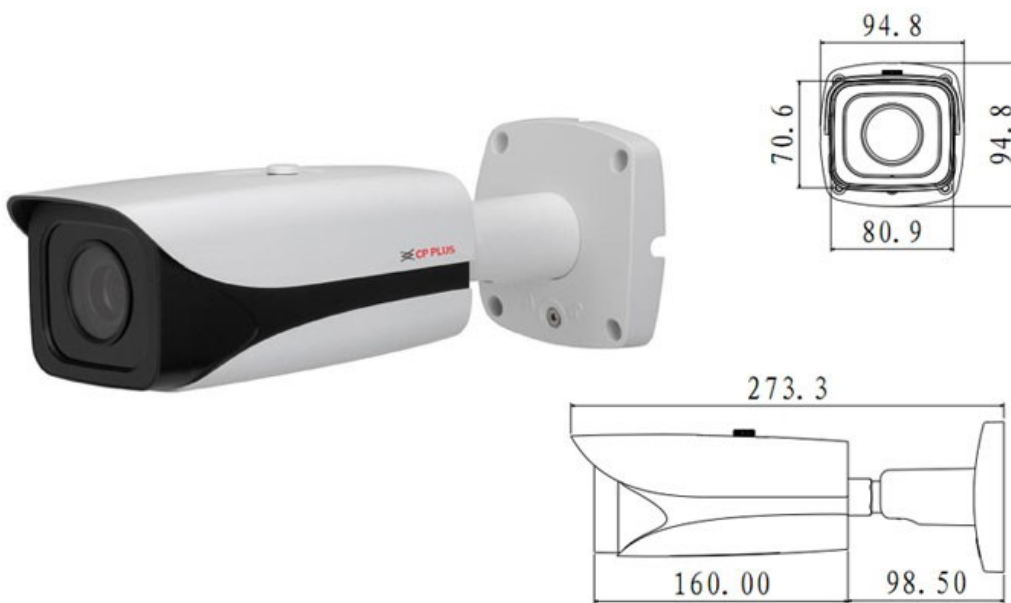

Main Features

- 1/2.8" 2MP PS CMOS Image Sensor
- 50/60fps@1080P(1920×1080)
- H.265 and H.264 triple-stream encoding
- WDR(140dB), Day/Night (ICR), Defog, ROI, EIS, 3D-DNR, AWB, AGC, BLC
- 2.7 -12mm motorized Lens, Micro SD
- IR Range of 50 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-TH21ZL5-VMD

2 MP H.265 WDR IR Bullet Camera - 50 Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Digital Zoom
 Privacy Mask
 ICR
 Motion Detection
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR

Specification

1/2.8" 2MP Progressive scan CMOS
 1920(H) x 1080(V)
 0.005Lux/F1.4(Color), 0Lux/F1.4(IR on)
 Auto/Manual, 1/3(4)~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.7 -12mm motorized
 Auto/Manual
 H.265/H.264
 More than 50dB
 BLC / HLC / WDR(140dB)/ SSA
 Main Stream: 1080P(1~50/60fps) , Sub Stream: D1 (1 ~ 50/60fps) , Third Stream: 1080P (1~50/60fps)
 1080P(1920x1080)/ 1.3M(1280x960)/ 720P(1280x720)/ D1(704x576/704x480) / VGA (640x480)/ CIF(352x288/342x240)
 16x
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Supports
 Off / On (4 Zone)
 1 Channel
 1 Channel
 G.711a/G.711Mu/AAC/ G.726
 2 Channel In
 1 Channel Out
 H.264: 24~ 10240Kbps , H.265: 14~ 6144Kbps
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/ v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection, People Counting, Heat Map
 RJ-45 (100/1000Base-T)
 20 Users
 50 Mtr.



*Product casing and specifications are subject to change without prior notice

CP- UNC-TH21ZL5-VMD

2 MP H.265 WDR IR Bullet Camera - 50 Mtr.



Feature

Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

iPhone, iPad, Android Phone
Max 128GB
-40°C~+60°C, Less than 95% RH
DC12V, PoE (802.3at)
<13W
IP67, IK10
273.2mm x 95.0mm x 96.4mm
1.12 Kg