


CP- UNC-VB21ZL3S-VMD

2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

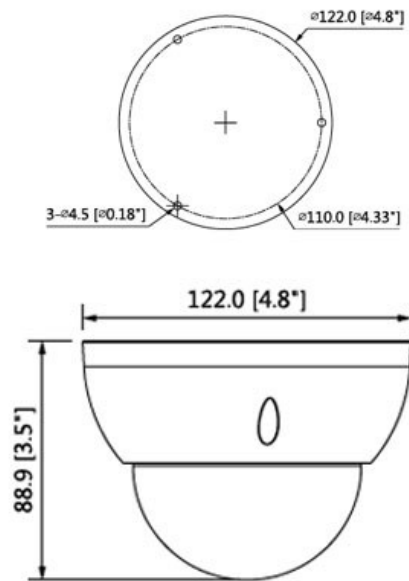

Main Features

- 1/2.8" 2MP PS CMOS Image Sensor
- Max. 25/30fps@2MP (1920×1080)
- H.265 and H.264 dual-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
- 2.7~13.5mm motorized lens
- IR Range of 30 Mtrs, Smart IR, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VB21ZL3S-VMD

2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control (AGC)
Video Compression
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Bit Rate
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature

Specification

1/2.8" 2MP Progressive scan CMOS
1920(H) x 1080(V)
0.006Lux/F1.4(Color,1/3s,30IRE) 0.05Lux/F1.4(Color,1/30s,30IRE) 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Natural/Street Lamp/Outdoor/Manual
2.7mm~13.5mm motorized Lens
Auto/Manual
H.265+/H.265/H.264+/H.264
BLC / HLC / WDR(120dB)
More than 45dB
2MP (1 ~ 25/30fps) , D1/CIF(1 ~ 25/30fps)
1080P(1920x1080)/SXGA(1280x1024)/1.3M(1280x 960)/720P(1280x720)/D1
(704x576/704x480)/VGA(640x480)/CIF(352x288/352x240)
16x
Off / On (4 Zone, Rectangle)
Off / On (4 Area, Rectangle)
Auto (ICR)/Color/B/W
Off / On (4 Zone)
1Ch.
1Ch.
G.711A;G.711Mu;G.726;AAC
1 channel In: 5mA 5VDC
1 channel Out: 300mA 12VDC
H.265: 12K ~ 6400Kbps , H.264: 32K ~ 10240Kbps
HTTP;TCP;ARP;RTSP;RTP;UDP;RTCP;SMTP;FTP;DHCP;DNS;DDNS; PPPOE; IPv4/v6;SNMP; QoS;
UPnP; NTP; ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android Phone
IR Range of 30 Mtr. ,Smart IR
Micro SD, Max 128GB
-30°C~+60°C , Less than 95%RH



*Product casing and specifications are subject to change without prior notice

CP- UNC-VB21ZL3S-VMD

2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

DC12V, PoE (802.3af)

<8.3W

IP67 & IK10

φ122mm x 88.9mm

0.4Kg