
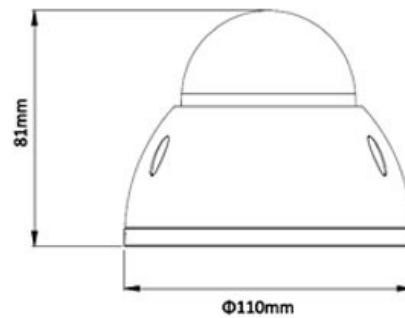


# CP-UNC-VD20L3-M

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



## Main Features

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-VD20L3-M

## 2 MP Full HD IR Vandal Dome Camera - 30Mtr.

Feature	Specification
Image Sensor	1/2.8" 2Megapixel progressive scan CMOS
Minimum Illumination	0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
Shutter Speed	Auto/Manual, 1/3(4)~1/10000s
White Balance	Auto/Manual
Gain Control(AGC)	Auto/Manual
Lens	3.6mm(6mm optional)
Back Light Compensation	BLC / HLC / DWDR
S/N Ratio	More than 50dB
Video Streaming	Main Stream: 1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
Resolution	1080P(1920× 1080)/ 720P(1280× 720) / D1(704× 576/704× 480)/ CIF(352× 288/352× 240)
Privacy Mask	Up to 4 areas
ICR	Auto(ICR)/Color/B/W
Audio Input	1 Channel
Audio Compression	G.711a / G.711u
Audio Output	1 Channel
Alarm IN	1 Channel In
Alarm Out	1 Channel Out
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Scene Change, Face detect
Ethernet	RJ-45 (10/100Base-T)
User Account	20 Users
IR	IR Range of 30 Mtr.
Smart Phone	iPhone, iPad, Android, Windows Phone
Micro SD	Max 64GB
Operating Temperature	-40°C~+60°C, Less than 95% RH
Power Source	DC12V, PoE (802.3af)
Power Consumption	Max 5W
Weatherproof Standard	IP67 & IK10
Dimension	Φ110mm × 81mm
Weight	0.33kg(with package 0.47kg)