
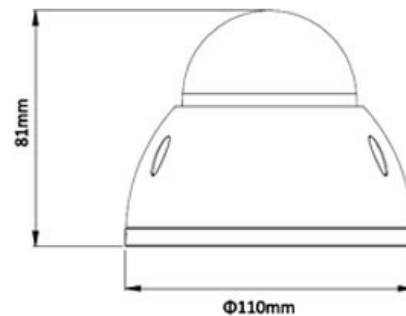


CP- UNC-VD21L3-VMD

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Main Features

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max 50/60fps@1080P
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported, SD Card
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, Micro SD Card, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VD21L3-VMD

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Effective Pixels
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 S/N Ratio
 Back Light Compensation
 Video Compression
 Video Streaming
 Resolution
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR
 Smart Phone

Specification

1/2.8" 2Megapixel progressive scan CMOS
 0.009Lux/F2.0 (Color), 0Lux/F2.0 (IR on)
 1920(H)x1080(V)
 Auto/Manual, 1/3(4)~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 3.6mm (2.8mm, 6mm optional)
 Auto/Manual
 More than 50dB
 BLC / HLC / WDR(120dB)
 H.265+/H.265/H.264+/H.264
 Main Stream: 1080P(1~50/60fps), Sub Stream: D1(1~50/60fps), Third Stream: 1080P(1~25/30fps)
 1080P(1920x 1080)/ 720P(1280x 720) / D1(704x 576/704x 480)/ CIF(352x 288/352x 240)
 Off / On (4 Zone, Rectangle)
 Up to 4 areas
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 channel
 1 channel
 G.711a/ G.711Mu/ AAC/ G.726
 1 channel
 1 channel
 H.264: 24~9472Kbps, H.265: 14~5632Kbps
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP;IGMP; SNMP, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Scene Change, Face detect
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.
 iPhone, iPad, Android



*Product casing and specifications are subject to change without prior notice

CP- UNC-VD21L3-VMD

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Max 128GB
-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
DC12V, PoE (802.3af)
Max 5W
IP67 & IK10
Φ109.9mm × 81mm (4.33"×3.19")
0.41kg (0.91lb)