
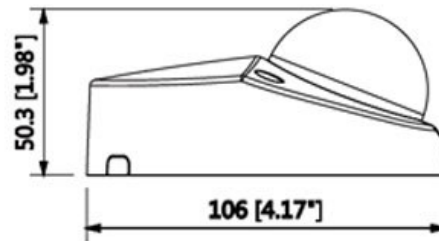


CP- UNC-WD21L2-VMD

2 MP Full HD WDR IR Dome Camera - 20Mtr.

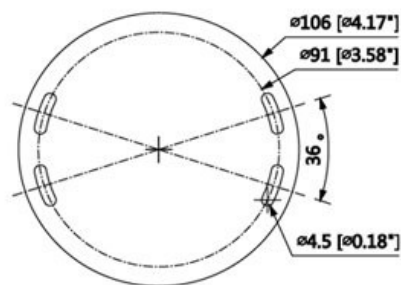

Main Features

- 1/2.8" 2Megapixel PS CMOS Image Sensor
- Max 50/60fps@1080P
- H.265 and H.264 triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 2.8mm lens (3.6mm, 6mm optional)
- IR Range of 20 Mtrs, IP67, IK10, SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-WD21L2-VMD

2 MP Full HD WDR IR Dome Camera - 20Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 S/N Ratio
 Video Compression
 Back Light Compensation
 Video Streaming
 Resolution
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Compression
 Pre/Post Alarm Buffer
 Watermark
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR
 Smart Phone
 Micro SD

Specification

1/2.8" 2Megapixel progressive scan CMOS
 1920(H)x1080(V)
 0.009Lux/F2.0(Color,1/3s,30IRE) 0.07Lux/2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
 Auto/Manual, 1/1~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.8mm (3.6mm, 6mm optional)
 Auto/Manual
 More than 50dB
 H.265+/H.265/H.264+/H.264
 BLC / HLC / WDR(120dB)
 Main Stream: 1080P(1~50/60fps), Sub Stream: D1(1~50/60fps), Third Stream: 1080P (1~25/30fps)
 1080P(1920x 1080)/ 720P(1280x 720) / D1(704x 576/704x 480)/ CIF(352x 288/352x 240)
 Off / On (4 Zone, Rectangle)
 Up to 4 areas
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 Built-in Mic
 G.711a/ G.711Mu/ AAC/ G.726
 Supports
 Supports
 H.264: 24~9472Kbps, H.265: 14~5632Kbps
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; SSL, IGMP, PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF (Profile S), PSIA, CGI
 Tripwire, Intrusion, Object Abandoned/Missing, Face detect
 RJ-45 (10/100Base-T)/M12 D-Coding
 20 Users
 IR Range of 20 Mtr.
 iPhone, iPad, Android
 Max 128GB



*Product casing and specifications are subject to change without prior notice

CP- UNC-WD21L2-VMD

2 MP Full HD WDR IR Dome Camera - 20Mtr.



Feature

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Regulatory
Dimension
Weight

Specification

-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
DC12V, PoE (802.3af)
<4.5W
IP67 & IK10
CE, FCC, RoHS and EN50155
Φ106mm x 50.3mm (4.17"×1.98")
0.4kg