


CP- VNC-T21R3M

2 MP Full HD IR Bullet Camera - 30Mtr.

INDIGO

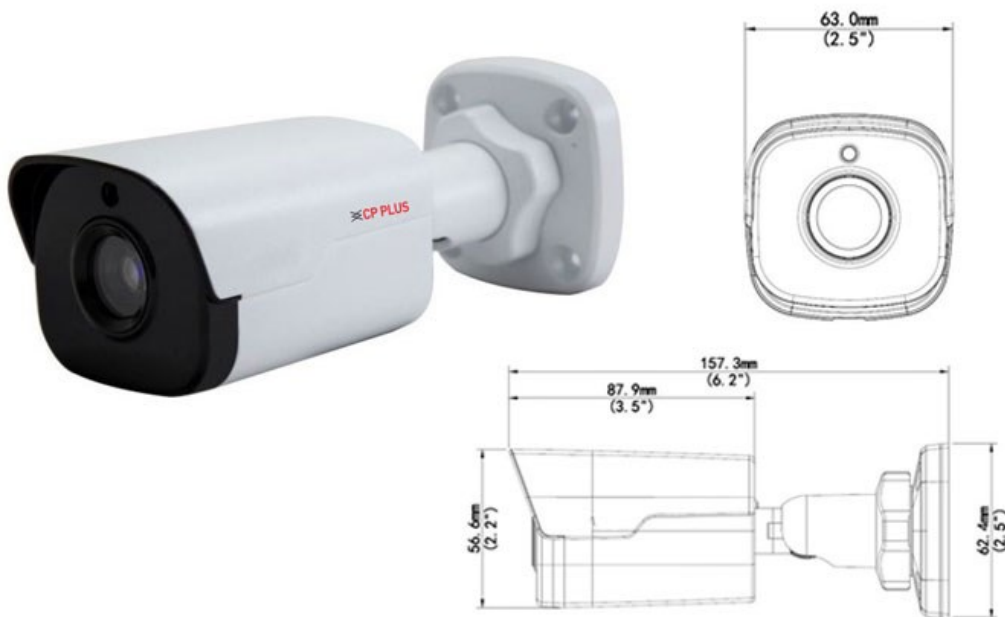

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- 1080P: Max. 30 fps , 720P: Max. 30 fps , D1: Max. 25 fps
- H.265, H.264, MJPEG Triple-stream Encoding
- DWDR, Day/Night (ICR), Corridor mode, 2D/3D-DNR, ROI, AWB, AGC, BLC
- 4mm lens (6mm Optional)
- IR Range of 30 Mtrs, Smart IR, IP66, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FCC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice

CP- VNC-T21R3M

2 MP Full HD IR Bullet Camera - 30Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control(AGC)
 S/N Ratio
 Video Compression
 Video Streaming
 Resolution
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 WDR
 Protocol
 Smart Detection
 Ethernet
 IR
 OSD
 Operating Temperature
 Humidity
 Power Source
 Power Consumption
 Weatherproof Standard
 Dimension
 Weight

Specification

1/2.7" 2MP Progressive scan CMOS
 Colour: 0.02 Lux (F1.8, AGC ON) 0 Lux with IR on
 Auto/Manual, 1/6~1/8000 s
 Auto/Manual
 4mm Lens (6mm Optional)
 Auto/Manual
 >52dB
 H.265, H.264, MJPEG
 Triple
 1920x1080
 1080P (1920 x 1080): Max. 30 fps , 720P (1280 x 720): Max. 30 fps , D1 (720 x 576): Max. 25 fps
 Up to 2 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Supports
 Digital
 L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, ONVIF, API
 Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting
 1 RJ45 10M/100M Base-TX Ethernet
 IR Range of 30 Mtr., Smart IR
 Up to 8 OSDs
 -35°C ~ +60°C (-31°F ~ 140°F)
 ≤ 95% RH (non-condensing)
 12 V DC, or PoE (IEEE802.3 af)
 Max 6.4 W
 IP66
 157.3 × 62.4 × 63 mm (6.2" × 2.5" × 2.5")
 0.45 kg

