


# CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.

INDIGO

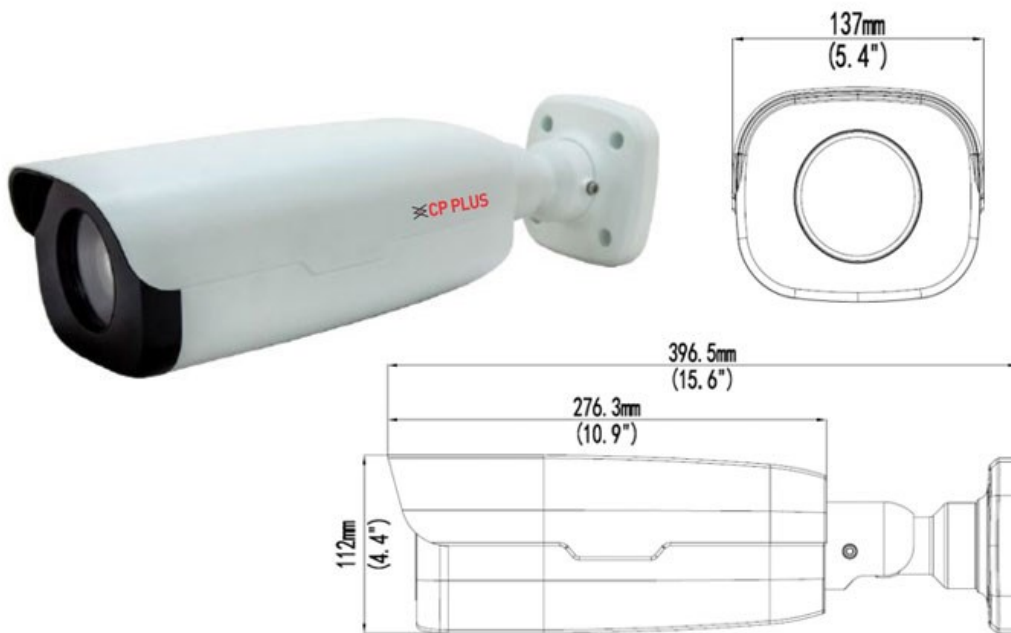

## Main Features

- 1/1.9" 2MP PS CMOS Image Sensor
- Max 60fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, ROI, AWB, AGC, BLC, HLC
- 6.5 ~ 143 mm Motorized Lens
- IR Range of 200 Mtrs, Micro SD, IP67
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



InstaStream

CE FCC RoHS COMPLIANT

# CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Video Streaming  
 Resolution  
 Video Output  
 Frame Rate  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Compression  
 Audio Output  
 Alarm IN  
 Alarm Out  
 WDR  
 Protocol  
 Smart Detection  
 Ethernet  
 IR  
 OSD  
 Interface Ports  
 Micro SD  
 Audio

## Specification

1/1.9" 2MP Progressive scan CMOS  
 Colour: 0.002 Lux (F1.5, AGC ON) 0 Lux with IR  
 Auto/Manual, 1/6~1/100000 s  
 Auto/Manual  
 6.5 ~ 143 mm Motorized Lens  
 Auto/Manual  
 H.265, H.264, MJPEG  
 >52dB  
 Triple  
 1920 x 1080  
 1 BNC, impedance 75Ω; amplitude 1 V [p-p]  
 1080P (1920×1080): Max.60 fps , 720P (1280×720): Max.30 fps , D1 (720×576): Max.15 fps  
 Up to 4 areas  
 Up to 8 areas  
 IR-cut filter with auto switch (ICR)  
 Supports  
 impedance 35 kΩ; amplitude 2 V [p-p]  
 G.711  
 impedance 600Ω; amplitude 2 V [p-p]  
 2 Ch. IN  
 1 Ch. Out  
 WDR (120dB)  
 IPv4, IGMP, ICMP, ARP, TCP, UDP, L2TP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x, ONVIF, API  
 Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting  
 100M Base-FX SFP + 100M Base-TX Ethernet  
 IR Range of 200 Mtr.  
 Up to 8 OSDs  
 1 RS485 (support Pelco-D/P)  
 Micro SD, Up to 128 GB  
 Two-way audio Supported



\*Product casing and specifications are subject to change without prior notice

# CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.



## Feature

Auto Iris  
Operating Temperature  
Humidity  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

Auto/Manual, F1.5~F3.4, DC-Iris  
-40°C ~ +60°C (-40°F ~ 140°F)  
≤ 95% RH (non-condensing)  
24 V AC ±25%  
6~19.5W  
IP67  
396.5mm x 137mm x 112mm (15.6" x 5.4" x 4.4")  
3.7 kg