


# CP- VNC-V21FR3-VMD

2 MP WDR VF Array Vandal Dome Camera - 30Mtr.

INDIGO

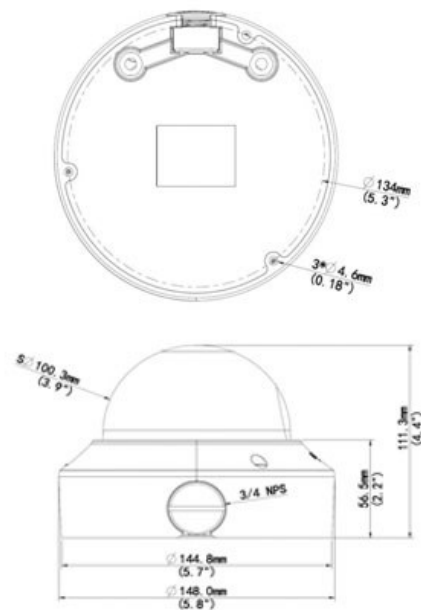

## Main Features

- 1/2.9" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, 3D-DNR, ROI, AWB, AGC, BLC
- 2.8~12mm Varifocal Lens
- IR Range of 30 Mtrs, Micro SD, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FCC RoHS COMPLIANT

\*Product casing and specifications are subject to change without prior notice

# CP- VNC-V21FR3-VMD

## 2 MP WDR VF Array Vandal Dome Camera - 30Mtr.



### Feature

Image Sensor  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control(AGC)  
Video Compression  
S/N Ratio  
Video Streaming  
Resolution  
Video Output  
Frame Rate  
Privacy Mask  
ICR  
ROI  
Audio Input  
Audio Compression  
Audio Output  
Alarm IN  
Alarm Out  
WDR  
Protocol  
Smart Detection  
Ethernet  
OSD  
IR  
Micro SD  
Audio  
Operating Temperature  
Humidity

### Specification

1/2.9" 2MP Progressive scan CMOS  
Colour: 0.03 Lux (F1.4, AGC ON) 0 Lux with IR  
Auto/Manual, 1/6~1/100000 s  
Auto/Manual  
2.8~12mm Varifocal Lens  
Auto/Manual  
H.265/ H.264/ MJPEG  
>52dB  
Triple  
1920 × 1080  
1 BNC, impedance 75Ω; amplitude 1 V [p-p]  
1080P (1920×1080): Max. 30 fps; 720P (1280×720): Max. 30 fps; D1 (720×576): Max. 8 fps  
Up to 8 areas  
IR-cut filter with auto switch (ICR)  
Supports  
impedance 35 kΩ; amplitude 2 V [p-p]  
G.711  
impedance 600 Ω; amplitude 2 V [p-p]  
1 IN  
1 Out  
Optical WDR (Upto 120dB)  
IPv4,IGMP,ICMP,ARP,TCP,UDP,L2TP, DHCP, PPPoE, RTP,RTSP,NTP,FTP,HTTP, SIP, ONVIF, API  
Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting  
1 RJ45 10M/100M Base-TX Ethernet  
Up to 8 OSDs  
IR Range of 30 Mtr., Smart IR  
Up to 128 GB  
Two-way audio Supported  
-40°C ~ +60°C (-40°F ~ 140°F)  
≤ 90% RH (non-condensing)



# CP- VNC-V21FR3-VMD

2 MP WDR VF Array Vandal Dome Camera - 30Mtr.



## Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

## Specification

12 V DC, or PoE (IEEE802.3 af)

max.8.5 W

IP67 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg