



CP- VNC-V21L3

2 MP Full HD IR Vandal Dome Camera - 30Mtr.

INDIGO

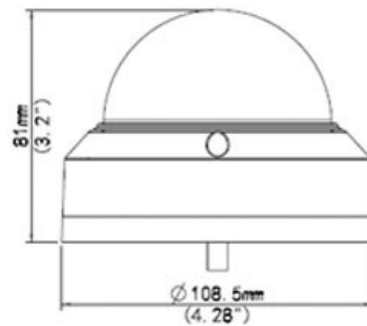

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- Max: 25/30fps@1080P , Max: 25/30fps@720P
- H.265, H.264, MJPEG Triple-stream encoding
- DWDR, Day/Night (ICR), Corridor mode, 2D/3D-DNR, ROI, AWB, AGC, BLC
- 2.8mm Lens (4mm Optional)
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



InstaStream

CE FCC RoHS COMPLIANT

*Product casing and specifications are subject to change without prior notice

CP- VNC-V21L3

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Video Compression
Video Streaming
Resolution
Frame Rate
Privacy Mask
ICR
ROI
WDR

Protocol
Ethernet
IR
OSD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2MP Progressive scan CMOS
Colour: 0.2 Lux (F2.2, AGC ON) 0 Lux with IR
Auto/Manual, 1/6~1/100000 s
Auto/Manual
2.8mm Lens (4mm Optional)
Auto/Manual
>52dB
H.265, H.264,MJPEG
Triple
2MP (1920 × 1080)
1080P (1920×1080): Max. 30 fps , 720P (1280×720): Max. 30 fps
Up to 8 areas
IR-cut filter with auto switch (ICR)
Supports
DWDR

IPv4, IGMP, ICMP, ARP, TCP, UDP, L2TP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, ONVIF,API
1 RJ45 10M/100M Base-TX Ethernet
IR Range of 30 Mtr.
Up to 8 OSDs
-35°C ~ +60°C (-31°F ~ 140°F)
≤ 90% RH (non-condensing)
12 V DC, or PoE (IEEE802.3 af)
Max 5.0W
IP66 & IK10
Φ108.5 x 81 mm (Ø4.28" x 3.2")
0.3 kg