


# CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.

INDIGO

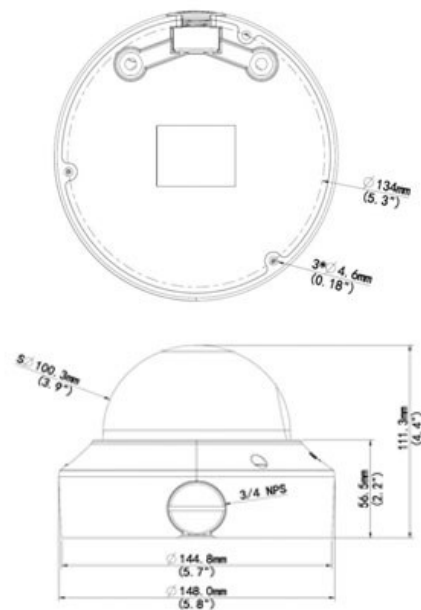

## Main Features

- 1/2.9" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, 3D-DNR, ROI, AWB, AGC, BLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD, IP66, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FCC RoHS COMPLIANT

\*Product casing and specifications are subject to change without prior notice

# CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Video Streaming  
 Resolution  
 Video Output  
 Frame Rate  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Compression  
 Audio Output  
 Alarm IN  
 Alarm Out  
 WDR  
 Protocol  
 Smart Detection  
 Ethernet  
 OSD  
 IR  
 Micro SD  
 Audio  
 Operating Temperature  
 Humidity

## Specification

1/2.9" 2MP Progressive scan CMOS  
 Colour: 0.02 Lux (F1.6, AGC ON) 0 Lux with IR  
 Auto/Manual, 1/6~1/100000 s  
 Auto/Manual  
 2.8~12mm Motorized Lens  
 Auto/Manual  
 H.265, H.264, MJPEG  
 >52dB  
 Triple  
 1920 x 1080  
 1 BNC, impedance 75Ω; amplitude 1 V [p-p]  
 1080P (1920 x 1080) @30 fps, 1080P (1920 x 1080) @25fps  
 Supports  
 IR-cut filter with auto switch (ICR)  
 Supports  
 impedance 35 kΩ; amplitude 2 V [p-p]  
 G.711  
 impedance 600 Ω; amplitude 2 V [p-p]  
 1 channel  
 1 channel  
 Optical WDR (Upto 120dB)  
 IPv4,IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, L2TP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS,SNMP, SMTP, SIP, 802.1x, ONVIF , API  
 Intrusion, crossing line, Motion detection, Audio detection, Face detection, People counting  
 1 RJ45 10M/100M Base-TX Ethernet  
 Up to 8 OSDs  
 IR Range of 30 Mtr. , Smart IR  
 Up to 128 GB  
 Two-way audio Supported  
 -40°C ~ +60°C (-40°F ~ 140°F)  
 ≤ 95% RH (non-condensing)



\*Product casing and specifications are subject to change without prior notice

# CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.



## Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

## Specification

12 V DC, or PoE (IEEE802.3 af)

max.6.6 W (PoE :max.7.2 W)

IP66 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg