


# CP- UNC-TE4K081ZL5-VM

4K Full HD IR Bullet Camera - 50Mtr.

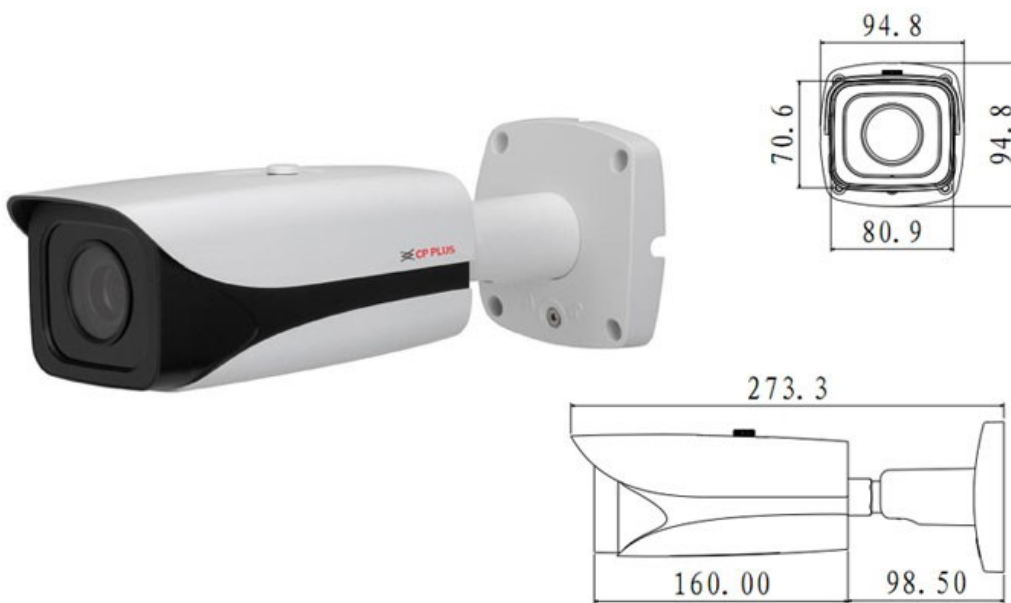

## Main Features

- 1/2.5" 8MP PS CMOS Image Sensor
- 15fps@4K(3840×2160),25/30fps@3Mp(2304×1296)
- H.265 and H.264 Triple-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.7mm ~12mm motorized lens
- IR Range of 50 Mtrs, IP67, Ik10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-TE4K081ZL5-VM

## 4K Full HD IR Bullet Camera - 50Mtr.



### Feature

Image Sensor  
 Effective Pixels  
 Minimum Illumination  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Input  
 Audio Output  
 Audio Compression  
 Alarm IN  
 Alarm Out  
 Bit Rate  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 IR  
 Smart Phone

### Specification

1/2.5" 8MP progressive scan CMOS  
 3840(H)x2160(V)  
 0.05Lux/F1.6 (Color), 0Lux/F1.6(IR on)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 2.7mm~12mm  
 Auto/Manual  
 H.265+/H.265/H.264+/H.264  
 More than 50dB  
 BLC / HLC / DWDR  
 Main Stream: 4K(1~15fps)/3M(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 720P(1~25/30fps)  
 4K(3840x 2160)3M(2048x 1536)/1080P(1920x 1080) /720P(1280x 720) /D1(704x 576/704x 480) / CIF(352x 288/352x 240)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Up to 4 areas  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 1 Channel  
 1 Channel  
 G.711a/ G.711Mu/ AAC/ G.726  
 2 Channel  
 1 Channel  
 CBR/VBR  
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 50 Mtr.  
 iPhone, iPad, Android



\*Product casing and specifications are subject to change without prior notice

# CP- UNC-TE4K081ZL5-VM

4K Full HD IR Bullet Camera - 50Mtr.



## Feature

No. of IR LEDs  
Micro SD  
Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

## Specification

4 IR  
Micro SD card 128GB  
-30° C ~ +60° C, Less than 95% RH  
DC12V, PoE (802.3af)  
<11.5W  
IP67 & IK10  
273.2mm×95.0mm×96.4mm (10.76"×3.74"×3.79")  
1.07Kg (2.36lb)