
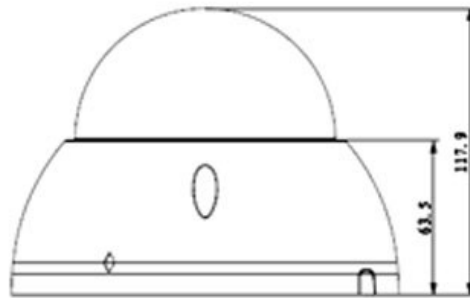


CP- UNC-VE4K081ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Main Features

- 1/2.5" 8MP Progressive Scan CMOS
- 15fps@4K, 25/30fps@3M
- H.265 and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7mm ~12mm motorized lens
- IR Range of 50 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



*Product casing and specifications are subject to change without prior notice

CP- UNC-VE4K081ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Feature	Specification
Image Sensor	1/2.5" 8MP Progressive scan CMOS
Minimum Illumination	0.05Lux/F1.6 (Color), 0Lux/F1.6(IR on)
Effective Pixels	3840(H)x2160(V)
Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control(AGC)	Auto/Manual
Lens	2.7mm~12mm Lens
Back Light Compensation	BLC / HLC / DWDR
S/N Ratio	More than 50dB
Video Compression	H.265+/H.265/H.264+/H.264
Video Streaming	Main Stream: 4K(1~15fps)/ 3M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 720P
Resolution	4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P (1920x1080)/ 1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)
Digital Zoom	16x
Motion detection	Off / On (4 Zone, Rectangle)
Privacy Mask	Up to 4 areas
ICR	Auto(ICR)/Color/B/W
ROI	Off / On (4 Zone)
Audio Input	1 Channel
Audio Compression	G.711a/ G.711Mu/ AAC/ G.726
Audio Output	1 Channel
Alarm IN	1 Channel
Alarm Out	1 Channel
Bit Rate	CBR/VBR
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Smart Detection	Tripwire, Intrusion, Object Abandoned/Missing, Face detect
Ethernet	RJ-45 (10/100Base-T)
User Account	10/ 20 Users
IR	IR Range of 50 Mtr.
Smart Phone	iPhone, iPad, Android Phone



*Product casing and specifications are subject to change without prior notice

CP- UNC-VE4K081ZL5-VM

4K Full HD IR Vandal Dome Camera - 50Mtr.



Feature

Micro SD
No. of IR LEDs
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Mirco SD card 128GB
3 IR
-30° C ~ +60° C, Less than 95% RH
DC12V, AC24V, PoE(802.3af)
<12.5W
IP67 & IK10
Φ159.1mm×117.9mm
0.89kg (1.96lb)